


Fast-Acting $1\frac{3}{32}$ " x $1\frac{1}{2}$ " (10x38mm) Photovoltaic Midget Fuses 600 Vdc UL Listed, CSA Component Certified, 4-30A PVM Series



Dimensions - in (mm)

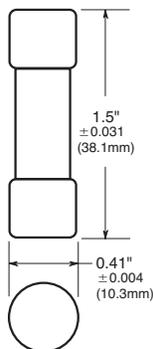

Catalog Symbol: PVM

Description

A range of UL 2579 fast-acting 600Vdc Midget fuses specifically designed to protect solar power systems in extreme ambient temperature, high cycling and low level fault current conditions (reverse current, multi-array fault).

Specifications

Volts: 600Vdc to UL 2579

Amps: 4 - 30A

Interrupting Rating: 50kA DC (4-30A)

Agency Information


UL Listed 2579, Guide JFGA, File E335324, CSA Component Certified C22.2

Typical Applications

- Solar Combiner Boxes
- Inverters
- Solar Strings

Recommended Fuse Blocks and Holders

- Modular CHM Series Fuse Holders Brochure #3185
- Open BM Series Fuse Blocks Data Sheet #1104
- In-Line Fuse Holders Data Sheet #2127 & #2126

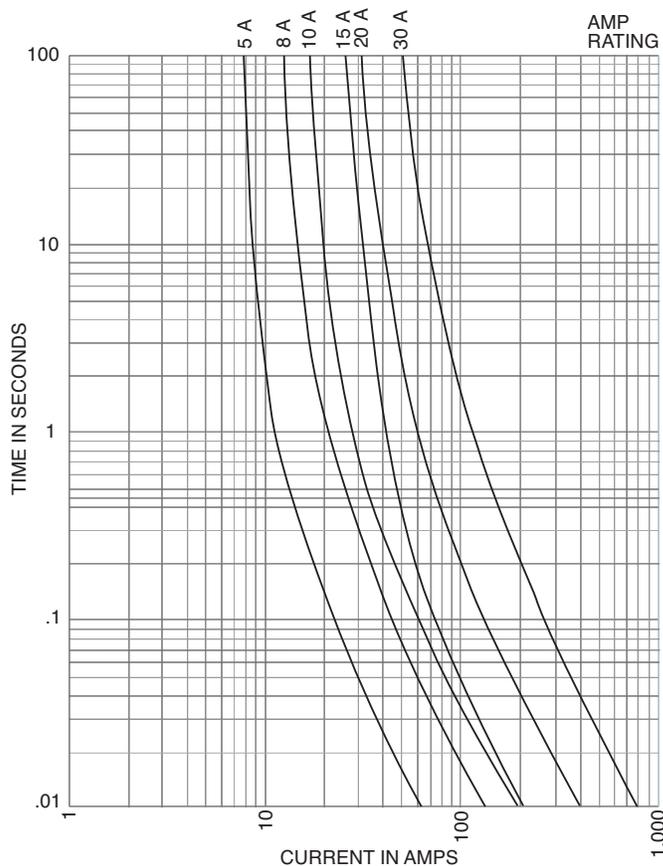

Power Loss (Watts)

Catalog Number	Amp Rating	Power Loss (Watts)	
		0.8 x I _n	1.0 x I _n
PVM-10	10	1.04	1.86
PVM-15	15	1.00	1.72
PVM-30	30	1.65	2.91

I_n = Rated current

Catalog Numbers (amp rating)

PVM-4	PVM-7	PVM-10	PVM-20
PVM-5	PVM-8	PVM-12	PVM-25
PVM-6	PVM-9	PVM-15	PVM-30

The only controlled copy of this Data Sheet is the electronic read-only version located on the Cooper Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.