


Trac 12/25 Low Voltage Trac System



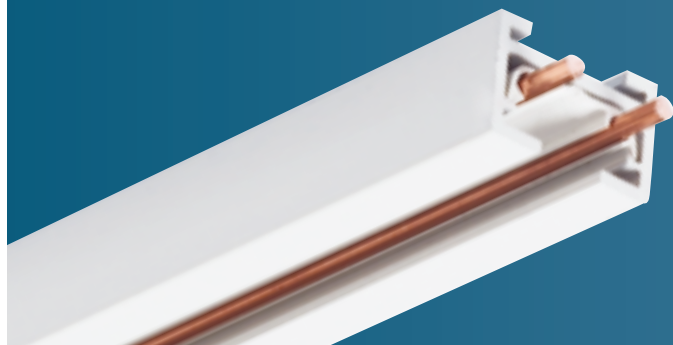


Trac 12/25 combines the 25-amp capacity of 10 gauge conductors with a miniature rigid profile that can be surface mounted or pendant suspended. The system operates off of remotely located 12 or 24-volt transformers. A maximum of 300 watts (12 volts) or 600 watts (24 volts) can be placed per circuit of trac.

Key Features:

- 10 gauge solid copper conductors with 25-amp capacity
- Rigid aluminum miniature $\frac{5}{8}$ "H x $\frac{15}{16}$ "W profile
- Accepts all standard Trac 12" lampholders
- Can be surface or pendant mounted
- White, black or silver finish

Trac 12/25 Trac Sections Includes dead-end and mounting hardware.



Electrical feeds for Trac 12/25 are ordered separately

CATALOG

TLR2	2' Trac (actual length 20 $\frac{1}{2}$ ")
TLR4	4' Trac (actual length 44 $\frac{1}{2}$ ")
TLR6	6' Trac (actual length 68 $\frac{1}{2}$ ")
TLR8	8' Trac (actual length 92 $\frac{1}{2}$ ")

FINISHES

White(WH), Black(BL), Silver(SL)
White(WH), Black(BL), Silver(SL)
White(WH), Black(BL), Silver(SL)
White(WH), Black(BL), Silver(SL)


Electrical Feeds and Dead End



TLR21 End Feed Connector and Outlet Box Cover

Allows trac to be fed via remote transformer from an outlet box. Includes terminal block, cover and mounting plate.


FINISHES: WHITE(WH), BLACK(BL), SILVER(SL)



TLR38 End Feed Connector

Allows trac to be fed via remote transformer from top using standard electrical connectors. Includes terminal block connector and cover.

FINISHES: WHITE(WH), BLACK(BL), SILVER(SL)



TLR34 End Feed Connector and Conduit Feed

Allows trac to be fed via remote transformer with conduit through the end or top using standard $\frac{1}{2}$ " electrical connectors. Includes terminal block feed connector, mounting plate and cover.

FINISHES: WHITE(WH), BLACK(BL), SILVER(SL)



TLR36 Outlet Box/T-Bar Ceiling Canopy

Mounts over outlet boxes or on T-bar ceiling to feed up to four tracs via a remote transformer. Includes one TLR36TB, mounting plate and cover. To feed more than one trac, order additional TLR36TB connectors.

Requires TLR37 for T-bar installation.

FINISHES: WHITE(WH), BLACK(BL), SILVER(SL)



TLR36TB Terminal Block Connector


FINISHES: WHITE(WH), BLACK(BL)



TLR28 Dead End

Dead end to use on extra field-cut trac sections.

FINISHES: WHITE(WH), BLACK(BL), SILVER(SL)




TLR50 Pendant Feed End Connector

For use in conjunction with TLR90/91/96 Pendant Stem assemblies to feed power into end of trac. Includes terminal block connector, support plate and cover.

FINISHES: WHITE(WH), BLACK(BL), SILVER(SL)


Joiners and T-Bar Attachment Clip



TLR23 Miniature Straight Connector

Joins two trac sections end-to-end. Includes terminal block joiner and cover.


FINISHES: WHITE(WH), BLACK(BL), SILVER(SL)



TLR20 Accordion Adjustable Joiner

Joins two trac sections at variable angles to left, right, up or down. Includes two terminal block connectors, joiner wires and covers.

FINISHES: WHITE(WH), BLACK(BL), SILVER(SL)



TLR24 Adjustable Connector

Joins two trac sections to form a 90-degree corner or straight coupling. Includes two terminal block connectors, joiner wires and cover.

FINISHES: WHITE(WH), BLACK(BL), SILVER(SL)



TLR37 T-Bar Attachment Clip

To attach trac to inverted $\frac{1}{8}$ " T-bar ceiling runner. Compatible with either flush tile or drop tile installations.