

6" Universal IC Recessed Downlight

EL7IC

EL7ICA

EL7ICNB (no bracket)


EL7ICANB

6" Universal Housing

Height: 7 1/2" - Ceiling Opening: 6 1/2"

Lamp: 90W Max

- For installations where the housing will be in direct contact with ceiling insulation.
- Integral thermal protector provides positive protection against over lamping or improper lamping.
- Adjustable socket bracket allows the use of different lamp types and sizes as well as proper and consistent lamp positioning.
- Junction box is listed for through branch circuit wiring and has six 1/2" knockouts with true pry-out slots.

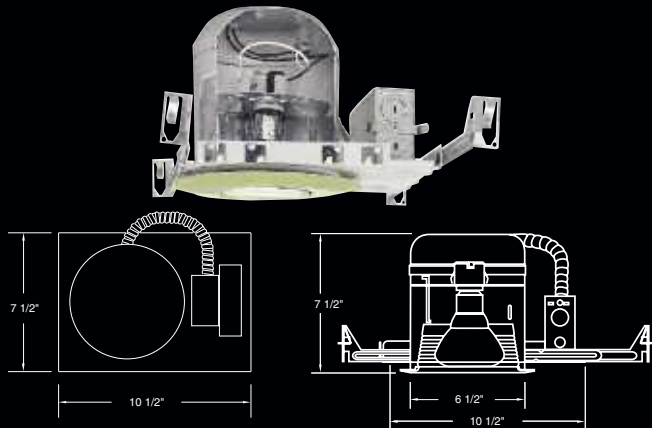

- Captive bar hangers span 24" joists and can be repositioned 90°
- 7 1/2" Height allows for use in 2 x 8 construction.
- Housing adjusts 1 3/8" to accommodate various ceiling thickness.
- U.L. Damp Location listed
- U.L. Feed through listed
- U.L. Listed for direct contact with insulation
- A= ASTM Airtight Fixture


EL7RICA

6" Remodel Housing Type IC

Height: 7 1/2" - Ceiling Opening: 6 1/2"

Lamp: 90W Max

- Integral thermal protector guards against improper lamping.
- Adjustable socket bracket.
- To cut exact size ceiling hole, use Elco EL5000 tool.
- Wiring box for use with 75°C supply wire.
- Unit slips through 6 1/2" ceiling cut out 6 3/8".

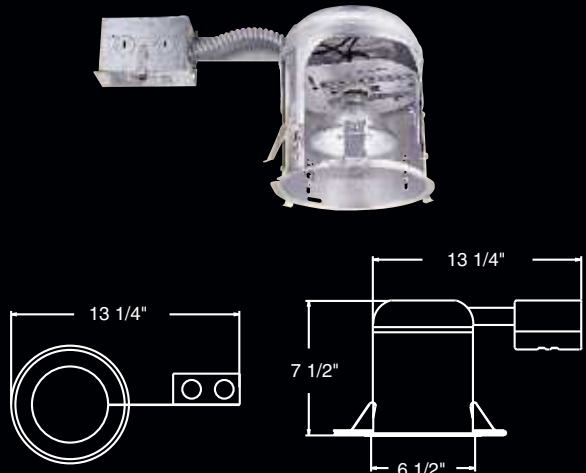

- Integral flange secures fixture against ceiling. Four remodel clips secure housing and accommodate various ceiling thickness. (up to 1 1/4")
- U.L. Damp Location Listed
- U.L. Listed for Direct contact with Insulation
- A= ASTM Airtight Fixture

EL7IC100A

Double Wall Housing Type IC

Height: 7 1/2" - Ceiling Opening: 6 1/2" - Lamp: 100W Max

- Housing is a thermally protected fixture that may be installed in direct contact with ceiling insulation.
- Integral thermal protector guards against improper lamping.
- Double wall aluminum housing.
- Junction box is listed for through branch circuit wiring and has (six) 1/2" knockouts with true pry-outs slots.
- Captive bar hangers span 24" joists and can be repositioned 90°.
- 7 1/2" height allows for use in 2 x 8 construction.
- Housing adjusts 3/4" to accommodate various ceiling thickness.
- U.L. listed for direct contact with insulation.
- A= ASTM Airtight Fixture

