

# Lumination™ LED Luminaires

Wrap Surface Mount  
WS Series



Project name \_\_\_\_\_


Date \_\_\_\_\_

Type \_\_\_\_\_

## Product Description:

The Lumination WS Series LED Luminaire is a commercial ceiling fixture that provides high uniformity, excellent efficiency and reduced glare in cooler and wash down applications. The improved lumen maintenance of L70 of initial lumens at 50,000 hours of operation allows lower maintenance costs over time.


## Product Dimensions:

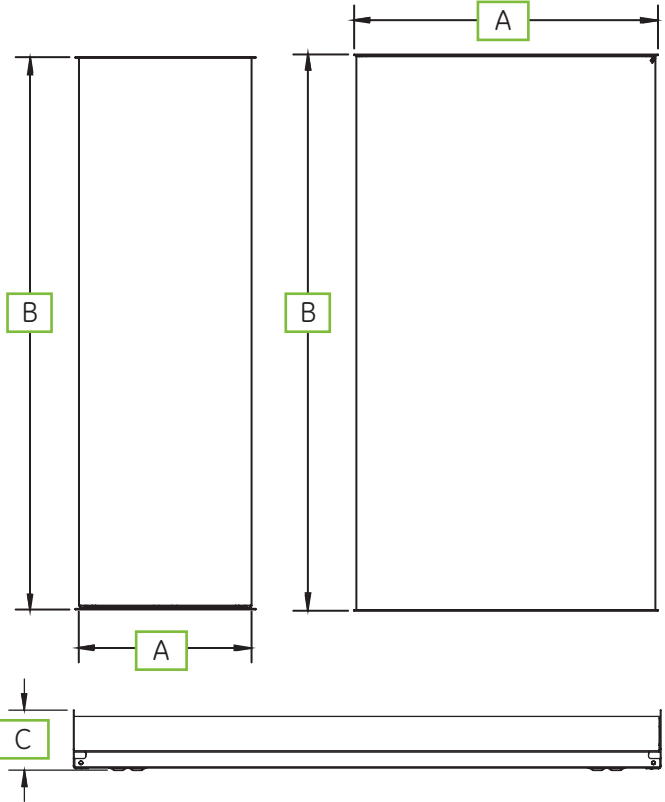

- 2' Narrow:** A = 7 in (177.8mm) B = 24 in (609.6mm) C = 2.5 in (63.5mm)
- 2' Wide:** A = 14 in (355.6mm) B = 24 in (609.6mm) C = 2.5 in (63.5mm)
- 4' Narrow:** A = 7 in (177.8mm) B = 48 in (1219.2mm) C = 2.5 in (63.5mm)
- 4' Wide:** A = 14 in (355.6mm) B = 48 in (1219.2mm) C = 2.5 in (63.5mm)

## Performance Summary:

- Distribution Patterns:** Lambertian
- Delivered Lumen Output:** 3200 to 8000 lm (4000K)
- System Input Power:** 30-72 W
- Efficacy:** 103-113 LPW (4000K)
- Input Voltage:** 120-277V
- CCT:** 4000K
- Typical CRI:** 80+, R9: >0
- Color Consistency:** 4 Step MacAdam Ellipse
- Lifetime Rating:** 50,000 Hours @ L70
- Input Frequency (Hz):** 50/60Hz
- Power Factor:** >0.9
- THD:** <20%
- Mounting:** Surface Mount w/Pre-drilled mounting holes
- Maximum Weight:** 14 lbs (6.35 kg)
- Limited Warranty:** 5 Years Standard
- Files Available:** LM79, LM80, IES

Certified by: 



## Ordering Information:

a product of  
**ecomagination™**

W S    0    S    V    W H T E

INTERNAL CODE	FIXTURE TYPE (NOMINAL)	VOLTAGE	OPTICAL CODE	MOUNTING	CONTROLLER	FINISH	OPTIONS
---------------	------------------------	---------	--------------	----------	------------	--------	---------

W = Wrap  
S = Surface Mount  
2N = 2' Narrow (7")  
2W = 2' Wide (14")  
4N = 4' Narrow (7")  
4W = 4' Wide (14")  
0 = 120-277V (UL Version)  
S = Surface  
V = 0-10V Dimming  
WHITE = White  
Blank if no options

DIMENSION	OPTICAL CODE	DISTRIBUTION TYPE	CRI	COLOR TEMP (K)	TYPICAL LUMENS	SYSTEM WATTAGE	EFFICACY (LPW)
2N = 2' Narrow (7")	A3	Lambertian	80	4000	3200	31	103
2W = 2' Wide (14")	A3	Lambertian	80	4000	4300	41	105
4N = 4' Narrow (7")	A3	Lambertian	80	4000	5600	51	110
4W = 4' Wide (14")	A3	Lambertian	80	4000	8000	72	113



imagination at work

# Photometric Data: 4' Wide - WS4W

WS-4W-0-A3-S-V-WHTE-DRAFT.IES

ZONAL LUMEN SUMMARY	
Zone	Lumens
0-10	277.15
10-20	784.06
20-30	1152.75
30-40	1329.22
40-50	1305.34
50-60	1128.07
60-70	865.05
70-80	563.47
80-90	246.15
90-100	86.73
100-110	74.71
110-120	61.91
120-130	48.12
130-140	34.66
140-150	22.71
150-160	12.70
160-170	5.69
170-180	1.52


COEFFICIENTS OF UTILIZATION																			
RC	80%					70%				50%			30%			10%			0%
RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
0	118	118	118	118	115	115	115	115	109	109	109	103	103	103	98	98	98	96	
1	107	102	98	94	104	100	96	92	95	91	88	90	87	85	86	84	82	79	
2	98	89	82	77	95	87	81	75	83	78	73	79	75	71	75	72	68	66	
3	89	79	70	64	86	77	69	63	73	67	61	70	64	60	67	62	58	56	
4	82	70	61	54	79	68	60	54	65	58	53	62	56	51	60	55	50	48	
5	75	63	54	47	73	61	53	47	59	51	46	56	50	45	54	48	44	42	
6	70	56	48	41	67	55	47	41	53	46	40	51	44	39	49	43	39	37	
7	65	51	43	37	63	50	42	36	48	41	36	47	40	35	45	39	35	33	
8	60	47	38	33	58	46	38	32	44	37	32	43	36	32	41	35	31	29	
9	56	43	35	29	55	42	35	29	41	34	29	39	33	29	38	32	28	26	
10	53	40	32	27	51	39	32	27	38	31	26	37	30	26	35	30	26	24	

NOTE: Floor Cavity Reflectance : 20%

ZONAL LUMEN SUMMARY			
Zone	Lumens	% of Lamp	% of Fixture
0-30°	2213.96	N.A.	27.70
0-40°	3543.17	N.A.	44.30
0-60°	5976.58	N.A.	74.70
0-90°	7651.25	N.A.	95.60
90-120°	223.35	N.A.	2.80
90-130°	271.48	N.A.	3.40
90-150°	328.85	N.A.	4.10
90-180°	348.75	N.A.	4.40
0-180°	8000.00	N.A.	100.00

Total Luminaire Efficiency = N.A.%

LUMINANCE DATA (cd/sq.m)			
Angles	0°	45°	90°
45°	6096	6064	6016
55°	5510	5564	5599
65°	4981	5241	5405
75°	4589	5167	5854
85°	4213	6227	8664



## Product Specifications:

### Construction:

- Die-formed heavy-gauge steel.
- Smooth hemmed sides for safe handling.

### Electrical System:

- Class 2, replaceable, high efficiency LED driver rated for 50,000 hours when used within operating conditions.
- THD: <20%
- Transient Protection: 100 kHz ring wave, 2 kV level

### Applications:

- Industrial and garage locations as well as kitchens, offices, and storage locations.

### Optical System:

- Precision formed optical assembly comprised of high specular reflectors, and a transmissive lens.
- No visible diodes

### Installation:

- Drivers and internal components accessed via bottom of luminaire.

For more information and access to all of our resources, including our design tool visit: [www.gelighting.com](http://www.gelighting.com)



[www.gelighting.com](http://www.gelighting.com)

GE and the GE Monogram are trademarks of the General Electric Company. All other trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. GE Lighting and GE Lighting Solutions, LLC are businesses of the General Electric Company. © 2015 GE.

IND160 (Rev 06/11/15)