




GE
Lighting

17704 - F28T8/CW/4 6PK

GE garage & basement 19 watt T8 1-pack

- Passes TCLP, which can lower disposal costs.
- 1.0 inch diameter T8 with medium bi-pin (g13) base
- 28 inches long
- 4100K cool white light appearance
- Cool white light perfect for sizable spaces
- For use in large spaces such as basements and garages
- GE garage & basement fluorescent bulbs' cool white light is perfect for illuminating sizable spaces throughout your home. Use in large open spaces in your home including finished and unfinished basements, garages and rec rooms
- Lasts 3.4 years based on 6 hours per day usage

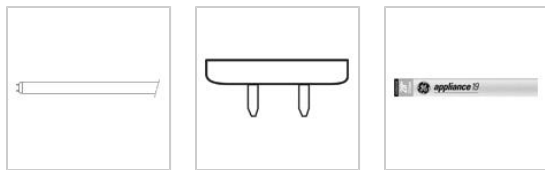

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Lamp Mortality

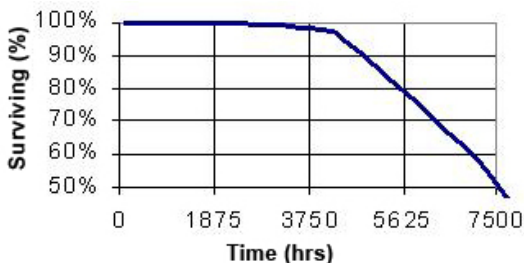

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight Linear
Bulb	T8
Base	Medium Bi-Pin (G13)
Rated Life	7500.0 hrs
Rated Life (instant start) @ Time	7500 h @ 3 h
Bulb Material	Soda lime
Starting Temperature (MIN)	10.0 °C
LEED-EB MR Credit	2096 picograms Hg per mean lumen hour
Additional Info	TCLP compliant
Primary Application	Appliance,Speciality

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1350.0
Mean Lumens	1145.0
Nominal Initial Lumens per Watt	71
Color Temperature	4100.0 K
Color Rendering Index (CRI)	60.0

ELECTRICAL CHARACTERISTICS

Wattage	19.0
Voltage	62.0
Open Circuit Voltage (after preheating) Max @ Temperature	210 V @ 10 °C
Open Circuit Voltage (rapid start) Min @ Temperature	108 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Open Circuit Voltage (after preheating) Min @ Temperature	108 V @ 10 °C
Preheat Voltage (MIN)	4.25 V
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL)	27.7800 in(705.6 mm)
Minimum Overall Length	27.6700 in(702.8 mm)
Nominal Length	28.000 in(711.2 mm)
Bulb Diameter (DIA) (MIN)	0.940 in(23.9 mm)
Bulb Diameter (DIA) (MAX)	1.100 in(27.9 mm)
Bulb Diameter (DIA)	1.000 in(25.4 mm)
Max Base Face to Base Face (A)	27.220 in(691.4 mm)
Face to End of Opposing Pin (B) (MIN)	27.400 in(696.0 mm)
Face to End of Opposing Pin (B) (MAX)	27.500 in(698.5 mm)
End of Base Pin to End of Opposite Pin End (C)	27.670 in(702.8 mm)

PRODUCT INFORMATION

Product Code	17704
Description	F28T8/CW/4 6PK
ANSI Code	2013-1
Standard Package	BUNDLE
Standard Package GTIN	00043168177047
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168980777