






GE
Lighting

97560 - F9BX/835/ECO

GE Ecolux® Biax® T4 - Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse




CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Remove and install by grasping only plastic portion of the lamp.

GRAPHS & CHARTS

Graphs_Spectral Power Distribution

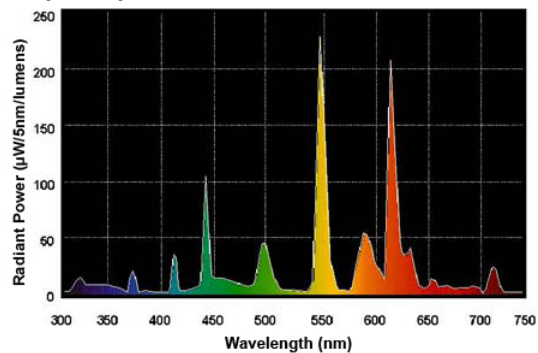

NOTES

- Based on 60Hz reference circuit.
- Fluorescent lamp lumens decline during life

GENERAL CHARACTERISTICS

Lamp Type	Compact Fluorescent - Plug-In
Bulb	T4
Base	G23
Equivalent Wattage	30.0 W
Rated Life (Vert)	10000.0 h
Rated Life	10000.0 hrs
Starting Temperature (MIN)	-18.0 °C
Cathode Resistance	11.1 Ohm
LEED-EB MR Credit	600 picograms Hg per mean lumen hour
Additional Info	TCLP compliant
Primary Application	Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (Vert)	600.0
Initial Lumens	600.0
Initial Lumens (Hor)	66.66667
Mean Lumens	500.0
Nominal Initial Lumens per Watt	66
Color Temperature	3500.0 K
Color Rendering Index (CRI)	82.0

ELECTRICAL CHARACTERISTICS

Amps	0.6 A
Wattage	9.0
Voltage (MIN)	9.0
Voltage	120.0
Open Circuit Voltage Across Starter (MIN)	198.0 V
Lamp Current	0.18 A
Current Crest Factor (MAX)	1.7
Supply Current Frequency	60.0 Hz

DIMENSIONS

Maximum Overall Length (MOL)	6.5900 in(167.4 mm)
Nominal Length	6.600 in(167.6 mm)
Base Face to Top of Lamp	5.670 in(144.0 mm)

PRODUCT INFORMATION

Product Code	97560
Description	F9BX/835/ECO
ANSI Code	60901-IEC-0009-1
Standard Package	BUNDLE
Standard Package GTIN	
Standard Package Quantity	100
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	100
UPC	043168975605