



71520FR



71520NP



71520NC



71520MB



71520ER

## Features - Specifications

### SINGLE FLUSH RECEPTACLE

- Face molded of impact/chemical-resistant nylon
- Base molded of reinforced thermoplastic polyester
- Combination back and side wiring, clamp-type terminals; accept #14 thru #8 AWG solid or stranded conductors
- One-piece rivetless copper-alloy contact design
- Heavy-duty mounting straps are nickel-plated to resist corrosion

### PLUG AND CONNECTOR

- Impact/chemical-resistant toughened nylon construction
- Internal "self-centering" Quad-Gripper cord grip with "radius teeth" design

- Double wall construction
- EPDM dust seal surrounds cord to help prevent moisture and contaminants from entering wiring chamber
- Captive terminal screws are backed out to simplify wiring
- Combination Phillips/slotted terminal and assembly screws

### MALE BASE AND FEMALE EQUIPMENT RECEPTACLE

- Impact/chemical-resistant toughened nylon construction
- Transparent terminal cover and extended "tear-drop" wiring pockets
- Combination Phillips/slotted terminal screws are backed out to simplify wiring

### PLUG, CONNECTOR AND MALE BASE

- UL Listed File #E1381 - Guide #AXUT
- CSA Certified File #LR16215 - Guide #20T2

### SINGLE AND FEMALE EQUIPMENT RECEPTACLE

- UL Listed File #E2258 - Guide #RTRT
- CSA Certified File #LR16215 - Guide #365E1

### ALL LOCKING DEVICES

- Comply with NEMA Standards WD-1, WD-6 and UL 498. See page P-1 for Federal Specification Listing.
- NOM
- CE

## LOCKING DEVICES

CATALOG NUMBER			CORD DIA.	DESCRIPTION
L14-20 20 AMP 125/250V	L15-20 20 AMP 250V 3Ø	L16-20 20 AMP 480V 3Ø		
71420FR 71420IG	71520FR 71520IG ①	71620FR 71620IG ①	— —	Single flush receptacle, black nylon Single flush receptacle, orange nylon, isolated ground
71420NP 71420NPC	71520NP 71520NPC	71620NP 71620NPC	.465-1.150 ② .465-1.150 ②	Plug, black/white nylon Same as above except w/Robertson head screws
71420NC 71420NCC	71520NC 71520NCC	71620NC 71620NCC	.465-1.150 ② .465-1.150 ②	Connector, black/white nylon Same as above except w/Robertson head screws
71420MB 71420ER	71520MB 71520ER	71620MB 71620ER	— —	Male base, white nylon cup Female equipment receptacle, white nylon cup


## INDOOR AND OUTDOOR RECEPTACLE PLATES ③

CATALOG NUMBER	DESCRIPTION
S6111 S28111 N01111 7420B	Type 302/304 stainless steel, smooth, single-gang .040 (1.0) brass, smooth, single-gang Black nylon, smooth, single-gang Die cast aluminum, with cover, single-gang, box mount

## WEATHER PROTECTIVE BOOTS ④

CATALOG NUMBER		DESCRIPTION
BLACK	YELLOW	
72002BPB 72002BCB 72002BSRB	72002BP 72002BC 72002BSR	Neoprene boot for use with plug Neoprene boot for use with connector Neoprene connector sealing ring

## PRODUCT DIMENSIONS — ( ) Indicates mm dimensions

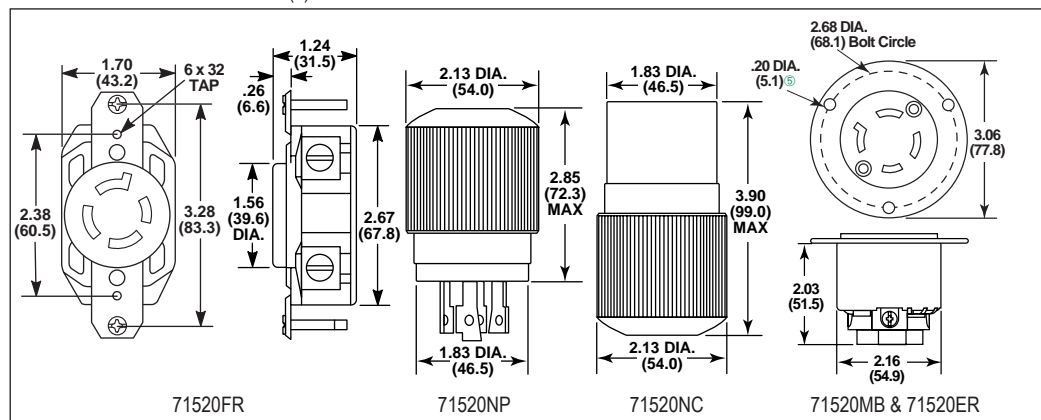

① To be discontinued when existing stocks are exhausted.  
② .465-1.150 (11.8-29.2)  
③ See Section M & N for complete information on plates.  
④ See page I-17 for more information on boots.

⑤ Three holes spaced 120 deg. apart on 2.68 (68.1) diameter bolt circle. See page P-3 for horsepower ratings. Specifications are subject to change without notice.