



65W

85W

105W

150W

180W

## ProLume® High Wattage Spirals



Halco offers an array of UL Listed, ProLume® High Wattage Spirals in 65, 85, 105, 150 and 180 wattages that provide significant savings. These lamps produce the quality and quantity of light required to replace less efficient technologies such as Incandescent and HID. The 150W and 180W lamps have an EX39 base, so they can be fitted into exclusionary base sockets and standard mogul sockets.

### Specifications:

- UL Listed
- 10,000 hour average rated life
- Instant on and self ballasted
- 0°F minimum starting temperature (150W & 180W); -10°F minimum starting temperature (65W, 85W and 105W)
- 82 CRI
- Medium, Mogul and Exclusionary Mogul base options
- 2700K and 5000K options
- 120V, 277V available in 105W
- 1-Year Limited Warranty

- » UL Listed
- » 10,000 hour life

### Markets:

- Residential
- Commercial

### Applications:

- Warehouses
- Gymnasiums
- High Bays
- Low Bays

where there's light, there's halco®

Contact your account representative at 800.677.3334 for pricing, orders and technical support.

Visit us at [halcolighting.com](http://halcolighting.com)

# ProLume High Wattage Spirals

Catalog Number: \_\_\_\_\_ Type: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Comments: \_\_\_\_\_ Date: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_

COMPACTS

## Ordering Information

Watt	Bulb	Base	Product #	Product Code	Description	Pkg. Qty.	Color Temp.	CRI	Lumens	Equiv.	Avg Rated Life	MOL (inc)
HIGH WATTAGE												
65 Watt	T5	Med.	45600	CFL65/27	Warm White	1/6	2700	82	4300	300 Inc.	10000	9.50"
65 Watt	T5	Med.	45604	CFL65/50	Natural White	1/6	5000	82	4300	300 Inc.	10000	9.50"
85 Watt	T5	Med.	45606	CFL85/27	Warm White	1/6	2700	82	5700	400 Inc.	10000	10.00"
85 Watt	T5	Med.	45610	CFL85/50	Natural White	1/6	5000	82	5700	400 Inc.	10000	10.00"
85 Watt	T5	Mog.	45500	CFL85/50/E39	Natural White	1/6	5000	82	5700	400 Inc.	10000	10.50"
105 Watt	T5	Med.	45618	CFL105/50	Natural White	1/6	5000	82	7000	500 Inc.	10000	10.75"
105 Watt	T5	Med.	45502	CFL105/50/277V	Natural White 277V	1/6	5000	82	7000	500 Inc.	10000	10.75"
105 Watt	T5	Mog.	45614	CFL105/50/E39	Natural White	1/6	5000	82	7000	500 Inc.	10000	11.25"
105 Watt	T5	Mog.	45504	CFL105/50/E39/277V	Natural White 277V	1/6	5000	82	7000	500 Inc.	10000	11.25"
150 Watt	T6	EX39	47000	CFL150/50/EX39	Natural White	1/6	5000	82	8800	250 MH	10000	13.03"
180 Watt	T6	EX39	47001	CFL180/50/EX39	Natural White	1/6	5000	82	11100	400 MH	10000	14.33"

Hg-LAMP CONTAINS MERCURY, MANAGE IN ACCORD WITH DISPOSAL LAWS.




Non-dimmable lamps should not be used on dimming circuits, timing devices, photo sensors or occupancy sensors.

This device is not intended for use with emergency exit fixtures.

WARRANTY - Commercial / Industrial: This product is warranted for 1 year from the date of purchase, based on 10 hours of use per day.

Not for use in enclosed fixtures.

## Energy Savings Comparison

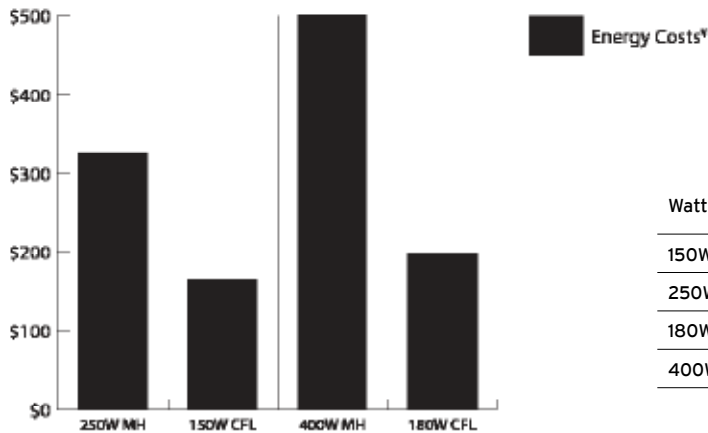

<sup>‡</sup> Energy costs based on \$0.11 kWh over 10,000 hour life.



Atlanta | Carlstadt | Cleveland | Los Angeles | Houston | Phoenix