


TYPE NBAS

Features

- Manufactured from high strength aluminum alloy
- Electro-tin plated
- Dual rated
- Assemblies available with 2-231 circuits
- UL Recognized for grounding and power, and CSA Certified



Benefits

- Provides maximum conductivity
- Low contact resistance
- Use with both copper and aluminum conductors
- Application versatility
- Ensures reliability

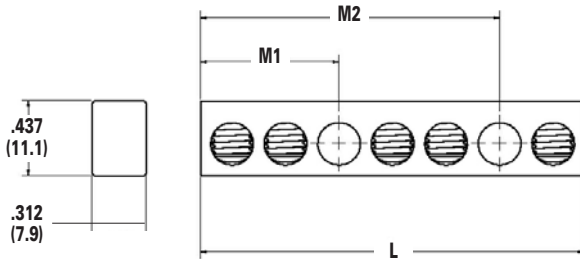

Catalog Number	Number of Circuits	Mounting Hole Locations ¹ in. (mm)		Screw Type	Configuration	Dimensions in. (mm)	
		M1	M2			L	
NBAS-002-1-A	2	0.492 (12.5)	- -	A	●○●	0.984	(25.0)
NBAS-002-1-B	2	0.492 (12.5)	- -	B	●○●	0.984	(25.0)
NBAS-003-1-A	3	0.804 (20.4)	- -	A	●●○●	1.296	(32.9)
NBAS-003-1-B	3	0.804 (20.4)	- -	B	●●○●	1.296	(32.9)
NBAS-004-1-B	4	0.804 (20.4)	- -	B	●●○●●	1.608	(40.8)
NBAS-004-2-B	4	0.180 (4.6)	1.740 (44.2)	B	○●●●○	1.920	(48.8)
NBAS-006-1-B	6	1.116 (28.3)	- -	B	●●●○●●	2.232	(56.7)
NBAS-008-2-A	8	0.492 (12.5)	2.676 (68.0)	A	●○●●●●●○●	3.168	(80.5)
NBAS-009-2-A	9	0.180 (4.6)	3.300 (83.8)	A	○●●●●●●●○△	3.792	(96.3)
NBAS-010-1-B	10	2.052 (52.1)	- -	B	●●●●△○△●●●●	4.104	(104.2)
NBAS-012-1-B	12	2.364 (60.0)	- -	B	●●●●△○△●●●●●	4.728	(120.1)
NBAS-012-2-A	12	1.116 (28.3)	3.300 (83.8)	A	●●●○●●●●●○●●	4.416	(112.2)
NBAS-013-2-A	13	1.116 (28.3)	3.612 (91.7)	A	●●●○●●●●●○●●●	4.728	(120.1)
NBAS-014-1-B	14	2.676 (60.0)	- -	B	●●●●●△○△●●●●●	5.354	(136.0)
NBAS-192-0-A*	192	- -	- -	A	● x 192	60.000	(1524.0)
NBAS-192-0-B	192	- -	- -	B	● x 192	60.000	(1524.0)
NBAS-231-0-A*	231	- -	- -	A	● x 231	72.000	(1828.8)
NBAS-231-0-B	231	- -	- -	B	● x 231	72.000	(1828.8)

¹ Mounting holes have a diameter of 0.203 in. (5.2mm)
 All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)
 * Screws are provided unassembled
 Tested to UL 486A/B, UL File E6207 and CSA C22.2 No. 65-03
 Tested to UL 467, UL File E6207




TYPE NBAS

Features

- Manufactured from high strength aluminum alloy
- Electro-tin plated
- Dual rated
- Assemblies available with 2-231 circuits
- UL Recognized for grounding and power, and CSA Certified

Benefits

- Provides maximum conductivity
- Low contact resistance
- Use with both copper and aluminum conductors
- Application versatility
- Ensures reliability

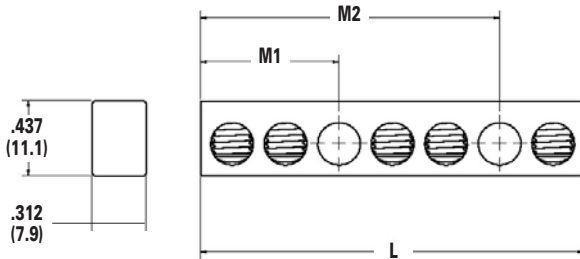

Catalog Number	Number of Circuits	Mounting Hole Locations ¹ in. (mm)		Screw Type	Configuration	Dimensions in. (mm)	
		M1	M2			L	
NBAS-002-1-A	2	0.492 (12.5)	- -	A	● ○ ●	0.984	(25.0)
NBAS-002-1-B	2	0.492 (12.5)	- -	B	● ○ ●	0.984	(25.0)
NBAS-003-1-A	3	0.804 (20.4)	- -	A	● ● ○ ●	1.296	(32.9)
NBAS-003-1-B	3	0.804 (20.4)	- -	B	● ● ○ ●	1.296	(32.9)
NBAS-004-1-B	4	0.804 (20.4)	- -	B	● ● ○ ● ●	1.608	(40.8)
NBAS-004-2-B	4	0.180 (4.6)	1.740 (44.2)	B	○ ● ● ● ○	1.920	(48.8)
NBAS-006-1-B	6	1.116 (28.3)	- -	B	● ● ● ○ ● ●	2.232	(56.7)
NBAS-008-2-A	8	0.492 (12.5)	2.676 (68.0)	A	● ○ ● ● ● ● ● ○ ●	3.168	(80.5)
NBAS-009-2-A	9	0.180 (4.6)	3.300 (83.8)	A	○ ● ● ● ● ● ● ● ○ △	3.792	(96.3)
NBAS-010-1-B	10	2.052 (52.1)	- -	B	● ● ● ● △ ○ △ ● ● ● ●	4.104	(104.2)
NBAS-012-1-B	12	2.364 (60.0)	- -	B	● ● ● ● △ ○ △ ● ● ● ● ● ●	4.728	(120.1)
NBAS-012-2-A	12	1.116 (28.3)	3.300 (83.8)	A	● ● ● ○ ● ● ● ● ● ○ ● ● ●	4.416	(112.2)
NBAS-013-2-A	13	1.116 (28.3)	3.612 (91.7)	A	● ● ● ○ ● ● ● ● ● ○ ● ● ● ●	4.728	(120.1)
NBAS-014-1-B	14	2.676 (60.0)	- -	B	● ● ● ● ● △ ○ △ ● ● ● ● ● ●	5.354	(136.0)
NBAS-192-0-A*	192	- -	- -	A	● x 192	60.000	(1524.0)
NBAS-192-0-B	192	- -	- -	B	● x 192	60.000	(1524.0)
NBAS-231-0-A*	231	- -	- -	A	● x 231	72.000	(1828.8)
NBAS-231-0-B	231	- -	- -	B	● x 231	72.000	(1828.8)

¹ Mounting holes have a diameter of 0.203 in. (5.2mm)
All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

* Screws are provided unassembled

Tested to UL 486A/B, UL File E6207 and CSA C22.2 No. 65-03

Tested to UL 467, UL File E6207

