



Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

# 5" SHALLOW UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

**IC25R**

## PRODUCT DESCRIPTION

IC Air-Loc® Remodel Housing • Energy efficient, sealed housing  
• IC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs • Can be completely covered with insulation • When used with Air-Loc Gasket, stops infiltration and exfiltration of air, reducing heating and cooling costs • Trims shown with Air-Loc symbol **Air-Loc** do not require a gasket.

## PRODUCT SPECIFICATIONS

**Lamp** Lamp ratings based on trim selected – see page 2.

**Socket** Medium base porcelain with nickel-plated copper screw shell  
• Floating socket with spring attaches to trim for installation.

**Trims** Trim selection shown on page 2.

**Labels** UL/cUL listed for through branch-wiring, damp locations and IP • Product thermally protected against improper use of lamps • Union made • UL and cUL Listed • Trim No. 212N is wet location approved for covered ceiling applications • Trims 275S and 276S are wet location approved for covered ceiling applications, **when used with outdoor rated PAR lamps.**

**Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance.



Specifications subject to change without notice.

## INSTALLATION

**Junction Box** Pre-wired junction box, UL/cUL Listed for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (5) ½" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots.

**Housing** IC housing, .032" aluminum sealed for Air-Loc Compliance  
• Remodel springs accommodate up to 1 ½" ceiling thickness.

## DIMENSIONS

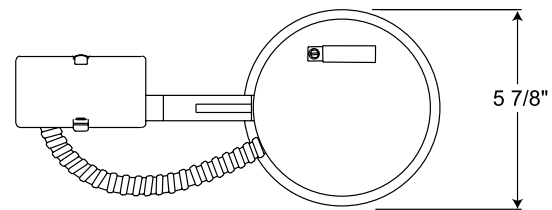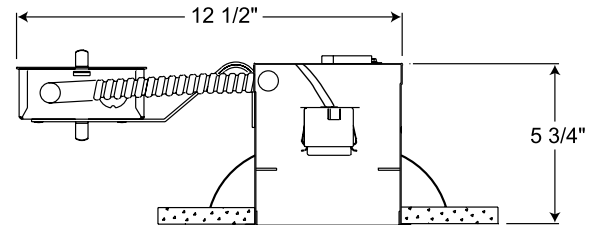

5 1/2" CEILING CUTOUT

## Accessories

Catalog Number	Description
ALG5R	Air-Loc Gasket

To order, specify catalog number.

## PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating
IC25R 5" Incandescent Remodel Shallow IC Housing	120V	R20/PAR20/BR30/PAR30/PAR30L (See page 2 for max. trim rating)
























Housing and trim can be ordered together or separate, but will always ship separately.

# 5" SHALLOW UNIVERSAL IC REMODEL HOUSING


INCANDESCENT LAMPS

**IC25R**

## TRIMS/LAMPS

	Catalog Number	Description	Max. Lamp Rating
		<b>275S BWH</b> ♦♦ Shallow Black Baffle, White Trim Ring	50W BR30, 50W PAR30, 50W PAR30L
		<b>275S WWH</b> ♦♦ Shallow White Baffle, White Trim Ring	
		<b>276S BWH</b> ♦♦ Shallow Black Cone, White Trim Ring	50W BR30, 50W PAR30, 50W PAR30L
		<b>276S CWH</b> ♦♦ Shallow Clear Alzak® Cone, White Trim Ring	
		<b>276S HZWH</b> ♦♦ Shallow Haze Cone, White Trim Ring	
		<b>276S WHZWH</b> ♦♦ Shallow Wheat Haze Cone, White Trim Ring	
		<b>276S WWH</b> ♦♦ Shallow White Cone, White Trim Ring	
	<b>208N BWH</b>	Eyeball w/Black Baffle, White Trim Ring	50W PAR20/R20
	<b>208N WWH</b>	Eyeball w/White Baffle, White Trim Ring	
	<b>529 WH</b>	Adjustable Eyeball, White	50W PAR30
	<b>529 SC</b>	Adjustable Eyeball, Satin Chrome	
	<b>529 BRZ</b>	Adjustable Eyeball, Bronze	
	<b>209N WH</b>	Gimbal Ring w/Flat Trim, White	35W PAR30, 35W PAR30L
		<b>688 BWH</b>	
	<b>688 WWH</b>	Gimbal Ring, White Baffle, White Trim Ring	35W PAR30, 35W PAR30L
		<b>689 CWH</b>	
		<b>689 GWH</b>	
		<b>689 WWH</b>	
		<b>689 HZWH</b>	
		<b>689 WHZWH</b>	
		<b>212N WH</b> ♦	
		<b>212N SC</b> ♦	
		<b>212N BRZ</b> ♦	35W PAR30

Trim Size: 6¼" O.D. (except Cat No. 529 - 6½" O.D.)  
Alzak is a registered trademark of Alcoa Corp.  
Note: In Canada when insulation is present,  
Type IC fixtures must be used.

 JUNO IC housings meet IECC Energy Code  
requirements per ASTM E283.  
Air-Loc® rated trims are pre-gasketed for minimum  
air leakage with IC housings.

♦ UL Listed for use in wet location.

♦♦ UL Listed for use in wet location with outdoor rated lamp.

Housing and trim can be ordered together or separate,  
but will always ship separately.