

FEATURES & SPECIFICATIONS

INTENDED USE — Recessed housing rated IC or Non-IC. For remodel construction only.

Approved for factory assembled wiring only.

Approved for direct burial in insulation.

CONSTRUCTION — Air-tight standard. Tested to meet current energy codes.

Aluminum housing with three remodel clips for installation in existing plaster, sheet rock or mechanical ceiling.

Heavy-gauge galvanized steel raceway arm.

Galvanized steel junction box with four built-in Romex clamps. Five 1/2" knockouts with slots for pryout. Not suitable for pulling wires.

Rated for 90° C.

Ground wire provided.

Removable J-box doors for easy access.

ELECTRICAL — Durable medium base porcelain socket with nickel-plated copper alloy screw shell and contact.

Socket clips to top of housing to prevent paint overspray in socket screw shell.

Socket attaches to reflector to ensure proper and consistent lamp position.

Thermal protection provided against improper lamp usage.

120 volt only.

INSTALLATION — Air-tight housing suitable for air-tight installations. Refer to energy codes for proper installations.

2x8 and 2x6 existing ceiling or T-bar ceiling panel installation.

Clip adjustment on housing (max. 5/8" and min. 1/2") allows for flush mounting with ceiling face.

LISTINGS — UL Listed to US and Canadian safety standards. Damp location listing (See trim selection for wet location listing).

WARRANTY — 1-year limited warranty. Complete warranty terms located at

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application.

Specifications subject to change without notice.

Catalog Number
Notes
Type


4" Remodel Housing

L3R

INCANDESCENT

IC/Non-IC

Remodel Construction

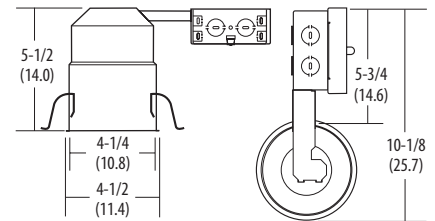

Specifications

Height: 5-1/2 (14.0)

Length: 10-1/8 (25.7)

Width: 5-3/4 (14.6)

Ceiling opening: 4-1/4 (10.8)

Ceiling cutout template: 4.01

All dimensions are inches (centimeters) unless otherwise specified.

ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

Example: L3R R6

L3R		
Series	Options	Packaging
L3R	Shipped installed in fixture PHC Poke-home wire connector	R6 Resale pack of six U Unit

Accessories: Order as separate catalog number.
ATK3 R6 Airtight trim kit

Notes

See trim summary on reverse side for maximum wattages.

L3R 4" Remodel Housing

LED Gimbal Module (Damp location)



Example: 4G1MW LED
L3R¹

ORDERING INFORMATION For shortest lead times, configure product using **bolded options**.

4G1		LED			
Series/Finish		Lamps	CCT / CRI / W / Lumens ³		Voltage
<u>Series</u>	<u>Finish</u>	LED	(blank)	3000k / 83CRI / 7.9W / 435L	(blank) 120V
4G1	4" Gimbal module	MW	Matte white	27K 90CRI 2700K / 91CRI / 8.3W / 480L	
		MB	Matte black ²	30K 90CRI 3000K / 93CRI / 7.7W / 500L	
		BN	Brush nickel ²	40K 90CRI 4000K / 94CRI / 8W / 560L	
		ORB	Oil-rubbed bronze ²		

Notes

- 1 L3R must be ordered on separate line.
- 2 Available in 30K 83CRI only.
- 3 Total system delivered lumens.

E Series Baffle Wide Flange LED Modules (Wet Location)



Example: 4BEMW LED
L3R¹

ORDERING INFORMATION For shortest lead times, configure product using **bolded options**.

4BEMW		LED			
Series/Finish		Lamps	CCT / CRI / W / Lumens ²		Voltage
4BEMW	4" Baffle LED module, matte white	LED	27K	2700 K / 82CRI / 10.3W / 530L	(blank) 120V
			30K	3000 K / 82CRI / 10.3W / 570L	
			40K	4000 K / 82CRI / 10.3W / 600L	
			50K 81CRI	5000K / 81CRI / 9.6W / 640L	
			27K 90CRI	2700K / 90CRI / 9.77W / 600L	
			30K 90CRI	3000K / 90CRI / 9.7W / 630L	
			40K 90CRI	4000K / 90CRI / 9.0W / 650L	

Notes

- 1 L3R must be ordered on separate line.
- 2 Total system delivered lumens.