

FEATURES & SPECIFICATIONS

INTENDED USE

Ideal for outdoor storage areas, building perimeters and loading docks.

CONSTRUCTION

Rugged, corrosion-resistant die-cast aluminum back housing and hinged door frame. Castings are sealed with a one-piece gasket to inhibit the entrance of external contaminants. Lens is thermal and shock-resistant clear tempered glass. Finish is bronze polyester powder paint for lasting durability.

ELECTRICAL

Ballast is constant-wattage autotransformer and 100% factory-tested.

Metal halide: super CWA pulse start ballasts, 88% efficient and EISA compliant, are required for 250-400W (must order SCWA option) for US shipments only. CSA required for probe start shipments to Canada. 250M and 400M do not comply with California Title 20 regulations.

OPTICS

Tempered glass lens. One piece anodized aluminum reflector provides IES cutoff distribution. Optional full cutoff visor available.

Mogul-base lamp included in carton as standard.

INSTALLATION

Housing is configured for mounting directly over a standard 4" outlet box or for surface wiring via any of three convenient 1/2" threaded conduit entry hubs.

LISTING

UL Listed to US and Canadian safety standards. Suitable for wet locations (25°C maximum ambient temperature).

Note: Specifications subject to change without notice.

Catalog Number
Notes
Type

Cutoff Wall Packs


TWR2C

METAL HALIDE: 250-400W

HIGH PRESSURE SODIUM: 250-400W



Consistent with LEED® goals & Green Globes™ criteria for light pollution reduction

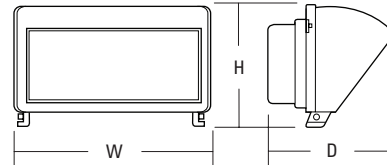

Specifications

Height: 10 (25.4)
 Width: 17-1/8 (43.5)
 Depth: 14-1/2 (36.8)
 *Weight: 24 lbs. (10.91 kg.)

All dimensions shown in inches (centimeters) unless otherwise noted.

*Weight as configured in example below.

ORDERING INFORMATION

Example: TWR2C 250M TB SCWA LPI

Catalog Number	Wattage	Voltage	Photocell included	Lamp included	Available in Canada
Metal halide					
TWR2C 250M 120 SCWA PE LPI	250	120	Y	Y	Y
TWR2C 250M 277 SCWA PE LPI	250	277	Y	Y	Y
TWR2C 250M 120/347 LPI CSA	250	120/347	N	Y	Y
TWR2C 250M TB SCWA LPI	250	120/208/240/277	N	Y	N
TWR2C 320M 120 SCWA PE LPI	320	120	Y	Y	Y
TWR2C 320M 277 SCWA PE LPI	320	277	Y	Y	Y
TWR2C 320M TB SCWA LPI	320	120/208/240/277	N	Y	N
TWR2C 400M 120 SCWA PE LPI	400	120	Y	Y	Y
TWR2C 400M 277 SCWA PE LPI	400	277	Y	Y	Y
TWR2C 400M 120/347 LPI CSA	400	120/347	N	Y	Y
TWR2C 400M TB SCWA LPI	400	120/208/240/277	N	Y	N
High pressure sodium					
TWR2C 250S 120/347 LPI CSA	250	120/347	N	Y	Y
TWR2C 250S TB LPI	250	120/208/240/277	N	Y	N
TWR2C 400S 120/347 LPI CSA	400	120/347	N	Y	Y
TWR2C 400S TB LPI	400	120/208/240/277	N	Y	N

Accessories: Order as separate catalog number. Shipped separately

TWR2C FCV U	Full cutoff visor
TWR2C WG U	Wireguard

TWR2C 250-400S M High Pressure Sodium/Metal Halide Cutoff Wall Pack



TWR2C-M-S