



MICRO SWITCH

FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929



SWITCH-BASIC



V 3-1

CK-A0100

5

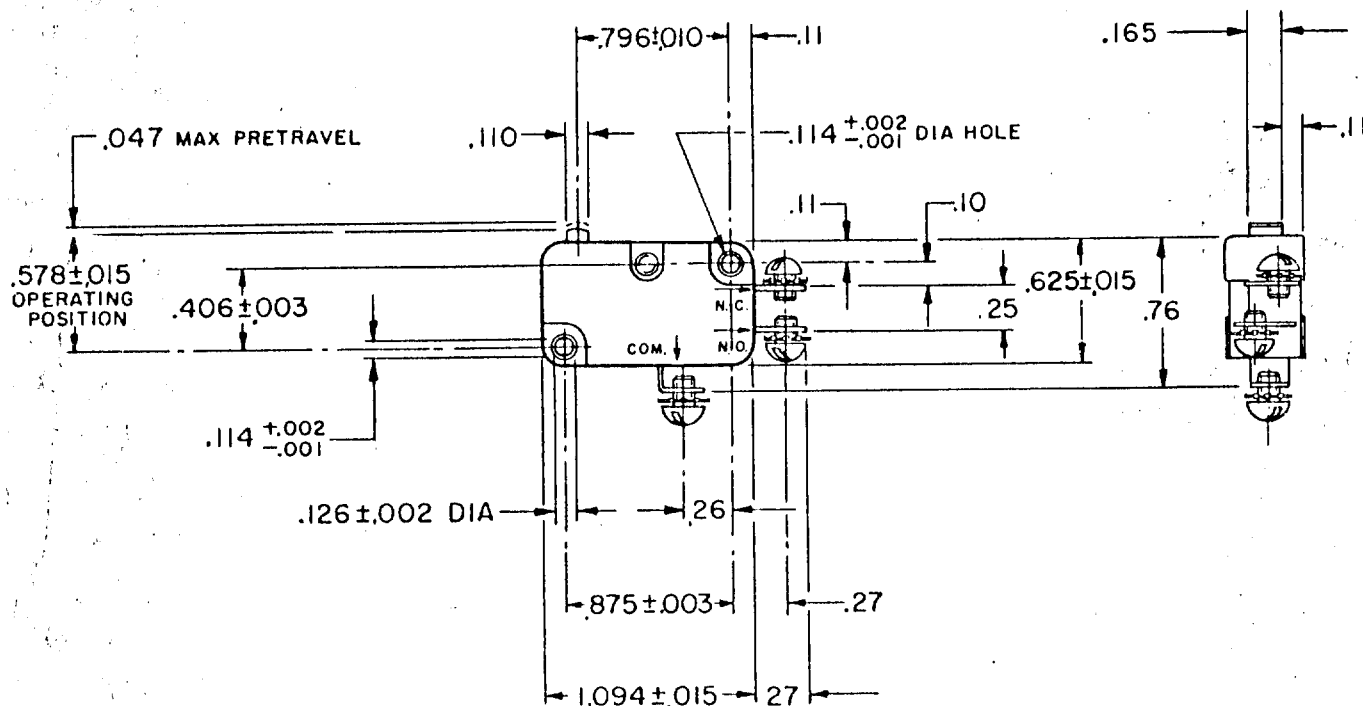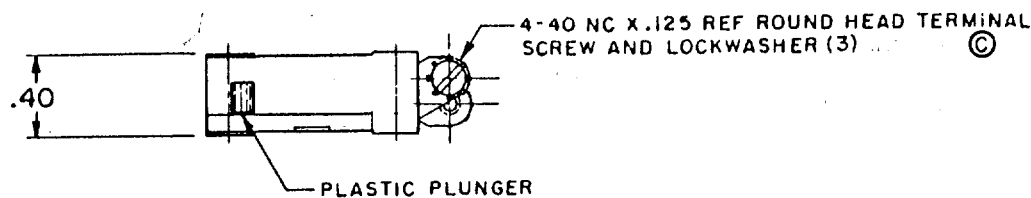

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — 6-14 OZ

RELEASE FORCE — — — 4 OZ MIN

DIFFERENTIAL TRAVEL — — .006 — .016

OVERTRAVEL — — — .040 MIN

FREE POSITION — — — .625 MAX

RELEASE TRAVEL — — — .007 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L83
15.1A 1/2HP 125 OR 250 VAC
1/2A 125 VDC, 1/4A 250 VDC
5A 125 VAC "L"



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT .017 LB

REPLACES

RELEASE NO.

CHECK PFK

18 MAY 65

CHECK PFK

18 MAY 65

CHECK PFK

18 MAY 65

CHECK PFK

18 MAY 65

CHECK PFK

18 MAY 65

CHECK PFK

18 MAY 65

CHECK PFK

18 MAY 65

DRAWN

FC-50378

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[V3-1](#)