

Catalog Number: U4911-X-QG-BL-AMS Item Description: 320A 7T BYPS OHUG VPC Code: 784572721401

Brand Name: Milbank

Type: Ringless Meter Socket

Application: Meter Socket

Standard: UL Listed

Voltage Rating: 600 Volts Alternating Current

Amperage Rating: 320 Continuous Ampere

Phase: 3 Phase

Frequency Rating: 60 Hertz

Number Of Cutouts: 0

Cable Entry: Overhead and Underground

Terminal: 3/8 Inch Stud Line Side and 3/8 Inch

Stud Load Side

Mounting: Surface Mount

Enclosure: Type 3R, G90 Galvanized Steel with


Powder Coat Finish


Additional Specifications: Number of Jaws:7 Terminal

Hub Opening and Closing Plates:Large Closing Plate



FEATURE TABLE					
ITEM	QTY	QTY DESCRIPTION			
Α	6	U/L MNTG.EMBOSS			
В	1	1/4 SOLID K.O.			
С	1	½, ¾, 1 CONC. K.O.			
D	2	2, 21/2, 3 CONC. K.O.			
Е	2	2, 2½, 3, 3½, 4 CONC. K.O.			



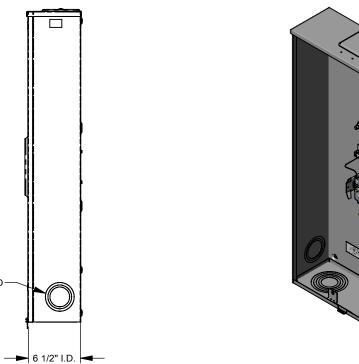

	17 3/4" (D.D. →		
l	E	-в /-с	<u> </u>	<u> </u>
9/16"1"	5 9/16"		3 7/8" 1 5/16"	3 3/16"

38 3/4"



Version:

All dimensions are +/- 1/16". Drawing views are not to scale. Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.