

Catalog Number: U5059-X-K3L

Item Description: 320A 4T RL OU HD LVR MAIN

784572371248

Brand Name: Milbank

Type: Ringless Meter Socket

Application: Meter Socket With Main

Standard: UL Listed

Voltage Rating: Up to 240 Volts Alternating Current

UPC Code:

Amperage Rating: 320 Continuous Ampere

Phase: 1 Phase

Frequency Rating: 60 Hertz

Number Of Cutouts: 2

Cutout Size: Breaker Provision

Cable Entry: Overhead and Underground

Terminal: Single Mechanical Line Side and Single

Mechanical Load Side

Mounting: Surface Mount


Enclosure: Type 3R, G90 Galvanized Steel with


Powder Coat Finish

Additional Specifications: Number of Jaws:4 Terminal


Hub Opening and Closing Plates:Large Closing Plate



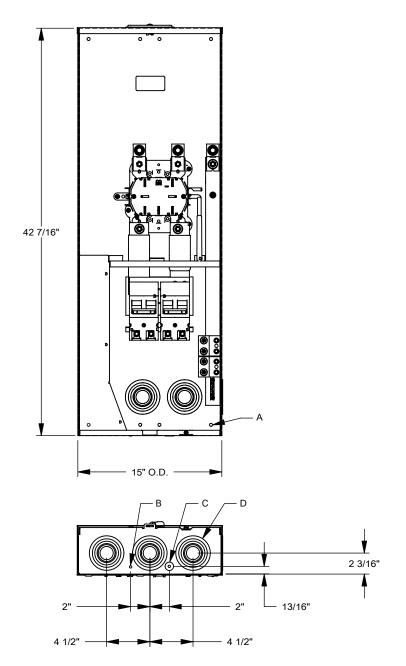

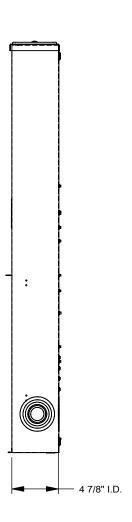

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
Α	8	STD. MNTG. EMBOSS
В	1	1/4 SOLID K.O.
С	1	14, 1/2 CONC. K.O.
D	6	1, 1¼, 1½, 2, 2½, 3 CONC. K.O.

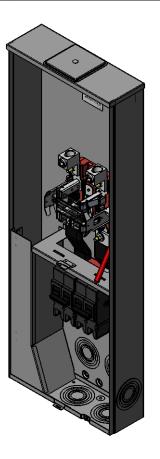



Version:

All dimensions are +/- 1/16". Drawing views are not to scale.

1

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.