

Catalog Number: U5168-XTL-150-KK-ALT Item Description: 200A 4T RL OU MAIN 8CRT **UPC Code:** 

784572496354

**Brand Name:** Milbank

Ringless Meter Socket Type:

Application: Meter Socket With Main And Load

Center

Standard: **UL** Listed

Voltage Rating: Up to 240 Volts Alternating Current

Amperage Rating: 200 Continuous Ampere

Phase: 1 Phase

Frequency Rating: 60 Hertz

Number Of Cutouts:

**Cutout Size:** 150 Ampere Main Breaker

Cable Entry: Overhead and Underground

Terminal: Lay in Line Side and Single Mechanical

Load Side

Surface Mount Mounting:

Enclosure: Type 3R, G90 Galvanized Steel with

Powder Coat Finish

Additional Specifications: Number of Jaws:4 Terminal

Hub Opening and Closing Plates: Twin Small Closing Plates


Hub Opening and Closing Plates: Twin Small Closing Plates

Hub Opening and Closing Plates: Twin Small Closing Plates


Hub Opening and Closing Plates: Twin Small Closing Plates

Hub Opening and Closing Plates: Twin Small Closing Plates



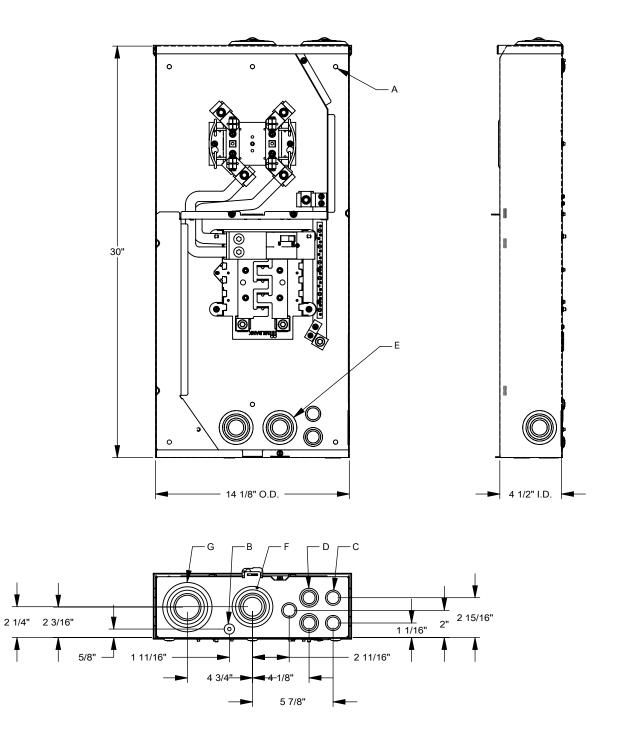

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
Α	6	U/L MNTG.EMBOSS
В	1	14, 1/2 CONC. K.O.
С	4	½, ¾ CONC. K.O.
D	2	½, ¾, 1 CONC. K.O.
Е	3	3/4, 1, 11/4, 11/2, 2 CONC. K.O.
F	1	1, 1¼, 1½, 2, 2½ CONC. K.O.
G	1	1¼, 1½, 2, 2½, 3 CONC. K.O.

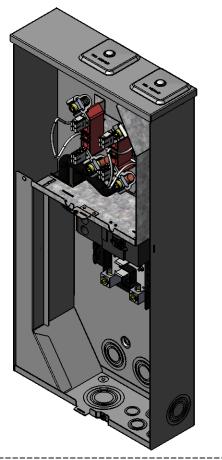



Version:

All dimensions are +/- 1/16". Drawing views are not to scale.

1

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.