


APPLICATIONS

- Commercial Locations
- Industrial Locations
- Institutional Locations
- Retail Locations

SPECIFICATIONS

- Low profile design
- Fully automatic operation at 120 or 277 VAC
- 60 Hz transformer (120/277 VAC, 60Hz input)
- 25+ years LED lamp life
- Universal mounting canopy for side or top installation
- V-0 flame retardant high-impact thermoplastic housing
- Excellent energy-savings
- 10½" LED Bar at bottom of fixture & includes 12 LED lamps
- Push to test switch
- Energy consumption of 3.2 Watts for red letters and 3.8 Watts for green letters
- Battery Backup units - Ni-cad battery with 90 minute generation
- Operating temperature: 32° – 122° Fahrenheit
- Listed for damp location

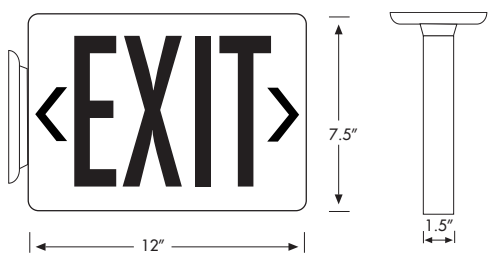

ORDERING INFO.

CATALOG NO.	UPC CODE	TYPE	LETTERING	HOUSING	SHIPPING WEIGHT (LBS)
EXLRW	05215	AC	red	white	3
EXLBURW	05219	battery backup	red	white	3
EXLBUGW	05220	battery backup	green	white	3

The compliance of our products to individual project specifications and approval for their use, is not warranted by NSi Lighting Products. Specification sheets and photometric data are provided as a guideline for applications information. Final consideration of any given application must take into consideration knowledge of the specific installation environment.

Questions call NSi Lighting Products at 1-800-321-5847