





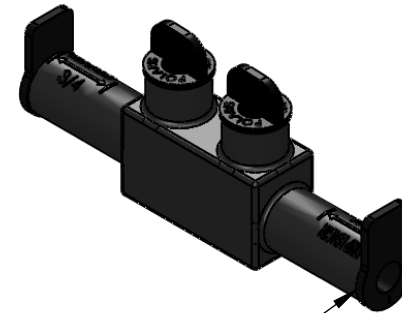


REMOVAL BE CAPS FOR
ACCESS TO 3/16 INTERNAL HEX
PRESSURE SCREWS

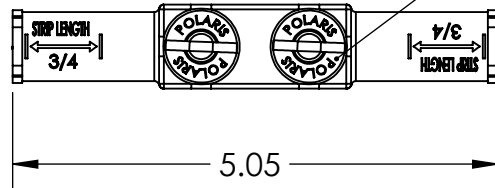

2/0 - #14 AWG
CONDUCTOR PORTS
ROCKET USED FOR #1-#14
DISCARD ROCKET FOR 1/0-2/0

CUT ROCKET AT
APPROPRIATE STEP
FOR WIRE SIZE
USED

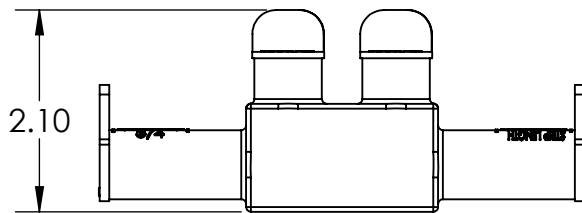

NOTES:

1. DI-ELECTRIC SILICONE FILM ON ROCKET AND CAP FOR EASY ASSY/DISSY.
2. PRE-FILLED W/ OXIDE INHIBITOR.
3. SHIPPED IN SEALED BAG W/ INSTALL INSTRUCTIONS.

		POLARIS SALES . CO . INC	
PROPRIETARY AND CONFIDENTIAL		11625 PROSPEROUS DRIVE ODESSA, FL 33556	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLARIS SALES CO. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLARIS SALES CO. INC. IS PROHIBITED.		TITLE: 2/0-#14 SUBMERSIBLE SPLICE	
NAME L. HILL		DATE 4/3/2014	
DWG. NO. ISPBS2/0		MATERIAL: 6061-T6511 ALUMINUM	
SCALE: 1:1		SHEET: 1 OF 1	