

CABLE TIES

Tefzel & Marker Cable Ties

TFZ, -ID Series

FEATURES

Tefzel Cable Ties (TFZ)


- Suitable for extreme environments, no toxic smoke.
- Rated for air handling spaces and chemical, weather and radiation resistant.
- Ideal for high temperature applications, up to 150 °C (302 °F) continuous operating temperature.
- Aqua blue in color.

MARKER CABLE TIES (-ID)

- Manufactured from natural colored Nylon 66, with an identification area provided (see STYLE).

SPECIFICATIONS

- UL 94V-0 approved.
- True Plenum Rating (TFZ).
- **Temperature Rating (TFZ):** 18.3 °C to 150 °C (65 °F to 302 °F).
Melting point 271.1 °C (520 °F).
- **TEFZEL (True Plenum Rating):** Air handling ties approved for indoor use in air handling spaces and plenums and ducts per NFPA-1993.
- UL62275 Listed.

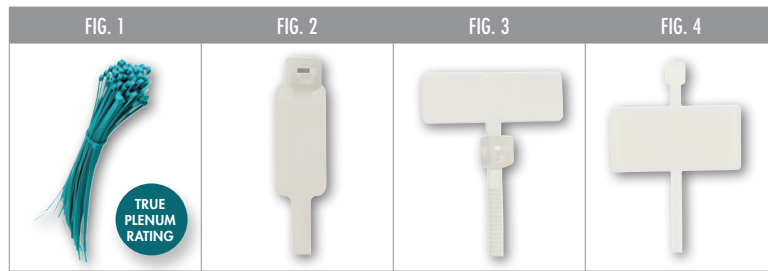

CAT. NO.	CERTIFICATION	FIG. NO.	STYLE	MAX. WIRE/CABLE SIZE	MAX. BUNDLE DIA.	MIN. TENSILE STRENGTH	LENGTH (IN.)	WIDTH (IN.)	STD. PKG. QTY.	STD. CTN. QTY.
TFZ850	UL Recognized	1	–	8"	1.750	50 Lbs.	7.500	0.190	100	1,000
TFZ1150	UL Recognized	1	–	11"	3.00	50 Lbs.	11.500	0.190	100	1,000
418-ID	UL	2	Vertical	4"	0.75	18 Lbs.	4.000	0.100	100	1,000
418F-ID	UL	3	Flag	4"	0.75	18 Lbs.	4.000	0.100	100	1,000
418H-ID	UL	4	Horizontal	4"	0.75	18 Lbs.	4.000	0.100	100	1,000
750-ID	UL	2	Vertical	7"	2	50 Lbs.	7.800	0.183	100	1,000
818H-ID	UL	4	Horizontal	8"	2	18 Lbs.	8.000	0.100	100	1,000

CABLE TIES