

CABLE TIES

Tefzel, Marker Cable Ties

TFZ, -ID SERIES



TEFZEL CABLE TIES



- Suitable for extreme environments.
- Rated for air handling spaces and chemical, weather and radiation resistant.
- Ideal for high temperature applications, up to 150 °C (302 °F) continuous operating temperature.
- UL 94V-0 approved.
- Aqua blue in color.

TEMPERATURE RATING:

18.3 °C to 150 °C (65 °F to 302 °F).
Melting point 271.1 °C (520 °F).

TRUE PLENUM RATING



Air handling ties approved for indoor use in air handling spaces and plenums and ducts per NFPA-1993.

MAX. WIRE/CABLE SIZE	CAT. NO.	MAX. BUNDLE DIA.	MIN. TENSILE STRENGTH	LENGTH (IN.)	WIDTH (IN.)	STD. PKG. QTY.	STD. CTN. QTY.
8"	TFZ850	1.750	50 Lbs.	7.500	0.190	100	1,000
11"	TFZ1150	3.000	50 Lbs.	11.500	0.190	100	1,000

MARKER TIES



- Manufactured from natural colored Nylon 66, with an identification area provided as detailed below (see STYLE).

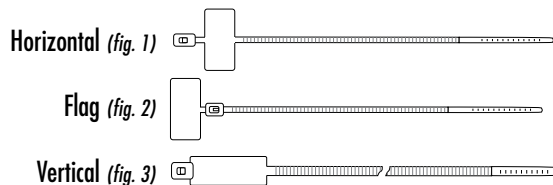

MAX. WIRE/CABLE SIZE	CAT. NO.	STYLE	MAX. BUNDLE DIA.	TENSILE STRENGTH	LENGTH (IN.)	WIDTH (IN.)	STD. PKG. QTY.	STD. CTN. QTY.
4"	418-ID	Vertical	0.75	18 Lbs.	4.000	0.100	100	1,000
	418F-ID	Flag	0.75	18 Lbs.	4.000	0.100	100	1,000
	418H-ID	Horizontal	0.75	18 Lbs.	4.000	0.100	100	1,000
7"	750-ID	Vertical	2	50 Lbs.	7.800	0.183	100	1,000
8"	818H-ID	Horizontal	2	18 Lbs.	8.000	0.100	100	1,000