



Pass & Seymour


## Hospital Grade Devices GFCIs 15 & 20A, 125VAC

1595-HG, 2095-HG, 1595-HGNTL, 2095-HGNTL, 1595-HGTR, 2095-HGTR,  
1595-HGL, 2095-HGL

### Hospital Grade GFCIs offer superior durability and protection.

**T**hey include the same features and benefits as our Specification Grade GFCIs including our patented SafeLock™ protection. P&S has the broadest range of ground-fault protection with the first LED Nightlight/GFCI Combination, the first Tamper-Resistant GFCI, and an Illuminated version — all offered with the Hospital Grade rating.

For non-Hospital Grade, refer to GFCIs tab section, SF1101R4.

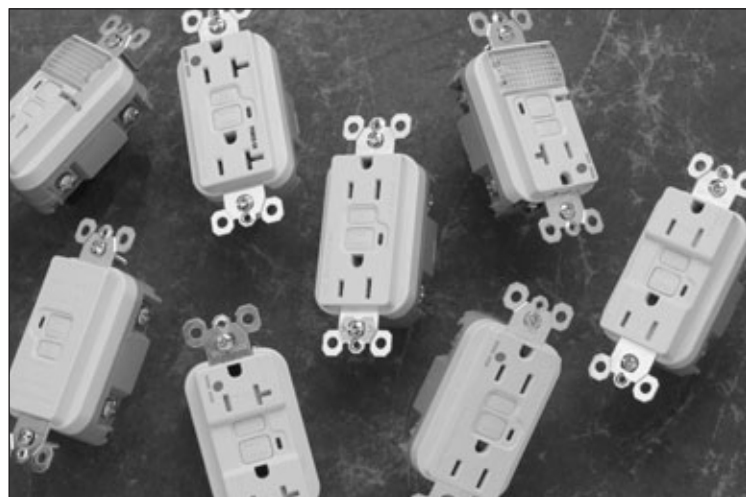

### Features & Benefits

**SafeLock™ Protection** denies power if the GFCI is miswired or if the GFCI is damaged and protection is lost. This prevents the unsafe condition of power without protection.

**Nickel post-plated mounting strap** for superior corrosion resistance.

**Trip indicator light** (red lamp) makes it easy to identify tripped condition.

**Side or internal screw-pressure-plate back wire termination** with #14 – #10 AWG stranded or solid, copper or copper-clad conductors.

**Captive screws** make for easier installation.

**Meets 2006 UL requirements.**

**Back wire clamp** allows for fast installation of ground wires.


**Two back wire holes per termination** add wiring flexibility, eliminate pigtail and save box space.

**Prevents line-load reversal miswire:** No power to the face or downstream receptacles if wired incorrectly.

**High-impact-resistant, thermoplastic construction** for superior strength and durability.

**1/4" thinner than competitors' GFCIs;** leaves more room for wires in the box.

**The most durable GFCI available.** Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.

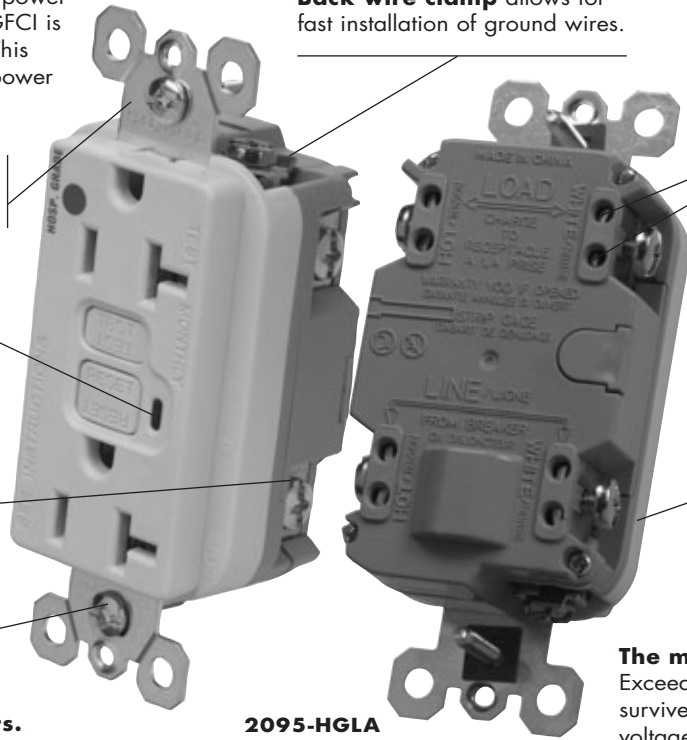





2095-HGLA

### Field Uses/Vertical Markets

- Health Care
- Education
- Institutional

# Hospital Grade Devices GFCIs 15 & 20A, 125VAC

## Ordering Information

Additional Features & Benefits	Catalog Number	Rating A.	VAC	Color	NEMA Config. No.
<b>Hospital Grade GFCI Receptacles</b>					
 <p><b>Patented SafeLock™ Protection</b> is standard on all P&amp;S Hospital Grade GFCIs.</p>	1595-HG*	15	125	I, W, Brown, GRY, RED, LA	5-15R
	2095-HG*	20	125	I, W, Brown, GRY, RED, LA	5-20R
<b>Hospital Grade Combination Nightlight/GFCI Receptacles</b>					
 <p><b>High impact-resistant lens</b> made of Lexan®.</p> <p><b>Energy-efficient LED</b> has average 20-year life expectancy, eliminating bulb replacement.</p> <p><b>Photocell</b> turns nightlight ON in dark, OFF in daylight.</p>	1595-HGNTL*	15	125	I, W, Brown, GRY, RED, LA	5-15R
	2095-HGNTL*	20	125	I, W, Brown, GRY, RED, LA	5-20R
<b>Hospital Grade Tamper-Resistant GFCI Receptacles</b>					
 <p><b>Dual mechanical shutter system</b> to help prevent insertion of foreign objects.</p> <p><b>Patented UL Listed shutter system.</b></p>	1595-HGTR*	15	125	I, W, Brown, GRY, RED, LA	5-15R
	2095-HGTR*	20	125	I, W, Brown, GRY, RED, LA	5-20R
<b>Hospital Grade Illuminated GFCI Receptacles</b>					
 <p><b>Green indicator light ON</b> when power is available.</p> <p><b>LED turns OFF</b> when unit has tripped or power has failed.</p>	1595-HG*L	15	125	I, W, Brown, GRY, RED, LA	5-15R
	2095-HG*L	20	125	I, W, Brown, GRY, RED, LA	5-20R



### \*Color Designation

I Ivory      - Brown      RED Red  
W White      GRY Gray      LA Light Almond

For more information on these and other P&S products refer to our Catalog or visit our web site.

# Hospital Grade Devices GFCIs 15 & 20A, 125VAC



Pass & Seymour

## Technical Specifications

### 3rd Party Compliance

cULus Listed File Number E42190, Standard UL498 Attachment Plugs and Receptacles, UL943 GFCIs. Federal Specification WC596, Hospital Grade. Standard CSA C22.2 No. 42 General Use Receptacles, CSA C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

### Performance

#### Electrical

Dielectric Voltage	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Maximum Working Voltage	125VAC
Voltage Range	102-132VAC

#### Mechanical

Terminal Identification	Terminals identified in accordance with UL498 (Hot, White, Green)
Terminal Accommodation	#14 AWG – #10 AWG solid or stranded copper conductor only
Product Identification	Ratings are a permanent part of device

#### Environmental

Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

### Materials


Face	Nylon	Hex Head Grounding Screw	Steel (Green)
Body	Nylon	Flat Head Mounting Screws	Zinc-Plated Steel
Contacts	.03" Brass (.8)	Test/Reset Buttons	Nylon
Mounting Straps	.05" Nickel-Plated Steel (1.3)	Nightlight Lens	* Lexan®
Terminal Screws	Nickel-Plated Steel #8 - 32	Tamper-Resistant Shutter	** Thermoplastic

\* For 1595-HGNTL and 2095-HGNTL Nightlight versions only.

\*\* For 1595-HGTR and 2095-HGTR Tamper-Resistant versions only.

### Warranty

1 Year

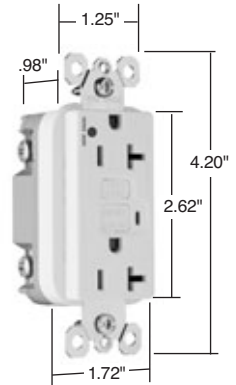

Dimensions for  
15 & 20 Amp



Nightlight/GFCI



Tamper-Resistant




Illuminated

## Complimentary Devices & Accessories




### HOSPITAL GRADE DEVICES

- Receptacles, Tamper-Resistant, Decorator
- GFCIs
- TVSS
- Isolated Ground
- Plugs & Connectors

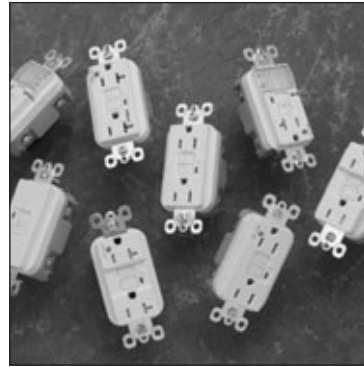


### GFCIs

- Specification Grade
- Hospital Grade
- Dead Front

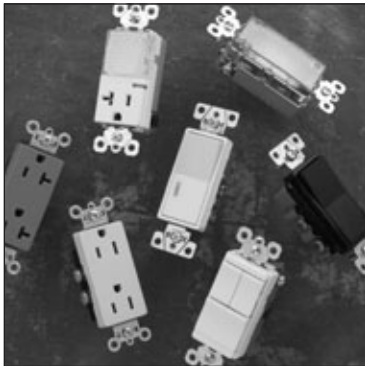


### DECORATOR DEVICES

- Construction Grade Switches
- Specification Grade Combo Switches
- Construction Grade Receptacles
- Commercial Grade Receptacles
- Specification Grade Hallway Lights

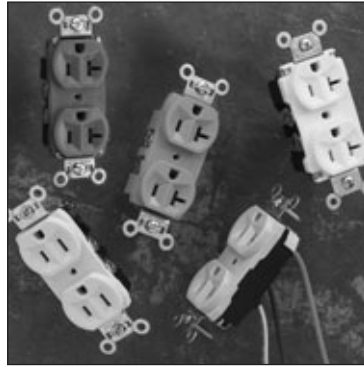

### STRAIGHT BLADE RECEPTACLES

- Extra Heavy-Duty
- Heavy-Duty
- Construction Grade
- Construction Grade Leaded
- Commercial Grade

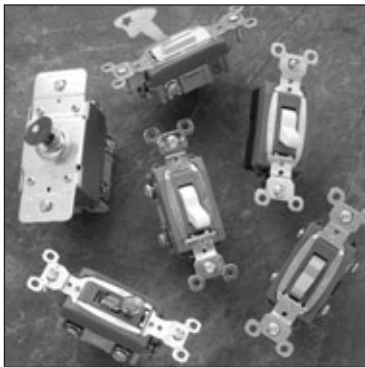

### SWITCHES

- Heavy-Duty Toggle
- Heavy-Duty Lighted Toggle
- Heavy-Duty Security
- Heavy-Duty Locking
- Construction Grade Toggle
- Commercial Grade Toggle



### WALL PLATES

- TradeMaster® Thermoplastic Nylon
- Screwless Polycarbonate
- Stainless Steel
- Brass
- Aluminum
- Dustproof Stainless Steel Covers

## Also available...

- |                                  |                                      |                               |                               |
|----------------------------------|--------------------------------------|-------------------------------|-------------------------------|
| ■ Light Almond Devices           | ■ Ground Continuity Monitoring (GCM) | ■ Turnlok® Locking Devices    | ■ IEC 309 Industrial Products |
| ■ PlugTail™ Devices              | ■ Straight Blade Plugs & Connectors  | ■ Weatherproof Boxes & Covers | ■ Flexcor® Wire Mesh Grips    |
| ■ TVSS & Isolated Ground Devices |                                      |                               | ■ Configurable Solutions      |



**Legrand/Pass & Seymour**  
P.O. Box 4822  
Syracuse, NY 13221-4822  
800-223-4185

**North America Headquarters**  
60 Woodlawn Street  
West Hartford, CT 06110  
Phone: 1.877.BY.LEGRAND (295.3472)  
Fax: 1.860.232.2062  
[www.legrand.us](http://www.legrand.us)

**Legrand Canada**  
570 Applewood Crescent  
Vaughan, ON, L4K 4B4  
Phone: 905.738.9195  
Fax: 905.738.9721  
[www.legrand.ca](http://www.legrand.ca)