



# PL-C Cluster 4-Pin Base

## PL-C 26W/841/4P/ALTO 10PK

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum efficiency and sleek design solutions are required.

### Warnings and Safety

• Lamp contains mercury. Manage in Accord with Disposal Laws. See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-800-555-0050

### Product data


General Information		LLMF 2000 h Rated		92 %	
Base	G24Q-3 [ G24q-3]	LLMF 4000 h Rated	87 %		
Life to 50% Failures Preheat (Nom)	13000 h	LLMF 6000 h Rated	83 %		
LSF Preheat 2000 h Rated	99 %	LLMF 8000 h Rated	81 %		
LSF Preheat 4000 h Rated	98 %	<b>Operating and Electrical</b>			
LSF Preheat 6000 h Rated	97 %	Power (Rated) (Nom)	26.0 W		
LSF Preheat 8000 h Rated	90 %	Lamp Current (Nom)	0.335 A		
<b>Light Technical</b>		<b>Temperature</b>			
Color Code	841 [ CCT of 4100K]	Design Temperature (Nom)	28 °C		
Initial lumen (Nom)	1800 lm	<b>Controls and Dimming</b>			
Luminous Flux (Rated) (Nom)	1800 lm	Dimmable	Yes		
Color Designation	Cool White (CW)				
Correlated Color Temperature (Nom)	4100 K				
Luminous Efficacy (rated) (Nom)	67 lm/W				
Color Rendering Index (Nom)	82				

# PL-C Cluster 4-Pin Base

Mechanical and Housing	
Cap-Base Information	4P
Approval and Application	
Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	29 kWh
Product Data	
Order product name	PL-C 26W/41/4P/ALTO 10PK

EAN/UPC - Product	046677111779
Order code	383372
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	927907384030
Net Weight (Piece)	60.400 g
ILCOS Code	FSQ-26/40/1B-E-G24q=3



## Dimensional drawing



Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
PL-C 26W/41/4P/ALTO 10PK	27.1 mm	27.1 mm	130.5 mm	149.0 mm	163.9 mm

PL-C 26W/840/4P

## Photometric data

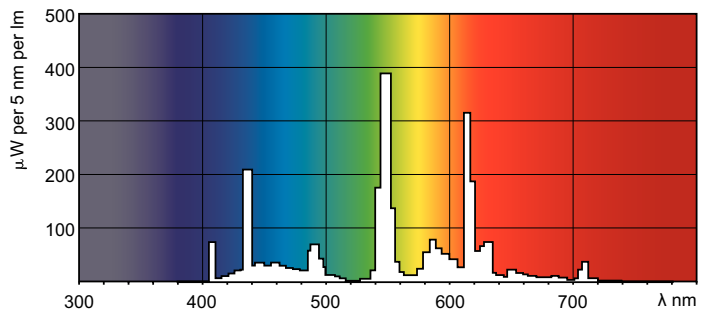
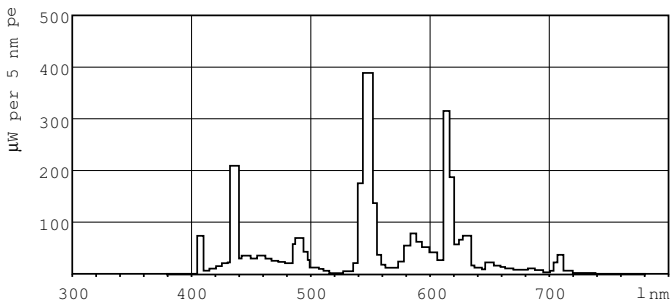


LDPB\_PLC4P\_840-Spectral power distribution B/W

LDPO\_PLC4P\_840-Spectral power distribution Colour


# PL-C Cluster 4-Pin Base

## Lifetime

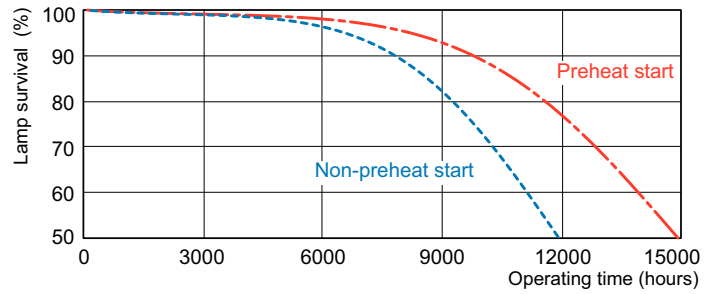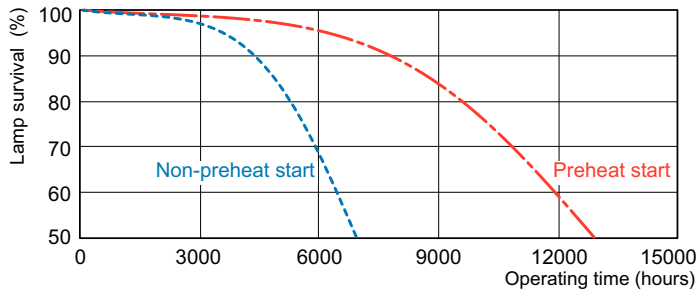

LDLE\_PLC4P\_0001-Life expectancy diagram

LDLE\_PLC4P\_0002-Life expectancy diagram



LDLM\_PLC4P\_0001-Lumen maintenance diagram

