





























**Wetguard™ Devices Engineered to IP66 & IP67 Watertight Standards**

*Wetguard™ Locking Plugs and Connectors*

DESCRIPTION	CAT. NO. PLUG	CAT. NO. CONNECTOR
High-Visibility Yellow, 30A-125V 2-Pole, 3-Wire	28W47 L5-30P 	29W47 L5-30R 
Black, 30A-125V 2-Pole, 3-Wire	28W47-B L5-30P 	29W47-B L5-30R 
High-Visibility Yellow, 30A-250V 2-Pole, 3-Wire	28W48 L6-30P 	29W48 L6-30R 
High-Visibility Yellow, 30A-277V 2-Pole, 3-Wire	28W49 L7-30P 	29W49 L7-30R 
High-Visibility Yellow, 30A-125/250V 3-Pole, 4-Wire	28W74 L14-30P 	29W74 L14-30R 
High-Visibility Yellow, 30A-3Ø 250V 3-Pole, 4-Wire	28W75 L15-30P 	29W75 L15-30R 
High-Visibility Yellow, 30A-3Ø 480V 3-Pole, 4-Wire	28W76 L16-30P 	29W76 L16-30R 
High-Visibility Yellow, 30A-3Ø 600V 3-Pole, 4-Wire	28W77 L17-30P 	29W77 L17-30R 
High-Visibility Yellow, 30A-3ØY 120/208V 4-Pole, 5-Wire	28W81 L21-30P 	29W81 L21-30R 
High-Visibility Yellow, 30A-3ØY 277/480V 4-Pole, 5-Wire	28W82 L22-30P 	29W82 L22-30R 
High-Visibility Yellow, 30A-3ØY 347/600V 4-Pole, 5-Wire	28W83 L23-30P 	29W83 L23-30R 



*Wetguard™ Non-NEMA, Non-Grounding Devices  
(For Replacement Use Only)*

DESCRIPTION	CAT. NO. PLUG	CAT. NO. CONNECTOR
High-Visibility Yellow, 30A-125/250V 3-Pole, 3-Wire★	28W08 NON-NEMA 	29W08 NON-NEMA 
High-Visibility Yellow, 30A-3ØY 120/208V 4-Pole, 4-Wire★	28W09 NON-NEMA 	29W09 NON-NEMA 

*Replacement Closure Cap*

DESCRIPTION	CAT. NO.
Replacement Connector Closure Cap for 30A devices	50W54

All locking devices are UL Listed. Also CSA certified except where indicated by★

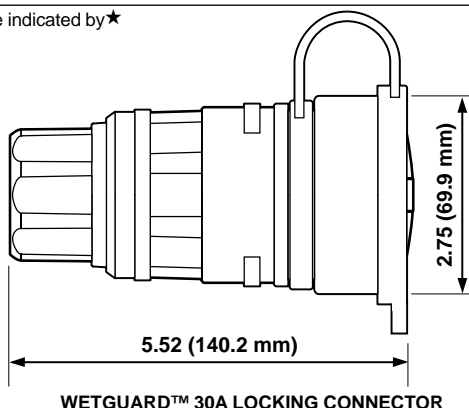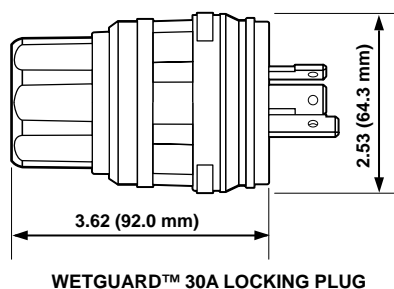

## SPECIFICATIONS & FEATURES

### Wetguard

- IEC IP66 and IP 67 Rated, in accordance with IEC 529 as evaluated by UL and CSA
- NEMA Type 4, 4X, 6 and 6P Ratings in accordance with UL 50 and CSA 94
- Outstanding resistance to wet and damp environments, extreme temperature variations, acids, alkalis, grease, oils and solvents
- Effective "tongue and groove" construction seals out water, moisture, dirt when plugs are mated with connectors
- Innovative strain-relief grips cables securely, keeps out water and moisture
- Cord clamp range for 30A devices: 12/3-8/5 SO, ST, SJ (.625"-1.125")
- Non-magnetic stainless steel fast-threading assembly screws won't interfere with sensitive equipment
- Connector "hood" closure cap seals device when not in use

## TESTING & CODE COMPLIANCE

- Meet NEMA WD 1 & 6, ANSI requirements
- UL Listed & meets Fed. Spec. requirements: (File #13393)
- CSA Certified (File #LR-406)
- NOM Certified (#057)
- Backed by a Limited 10-Year Warranty

## MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2  
Operating Temperature: -40°C to 65°C

# Locking Devices

Leviton's Industrial Specification Grade Locking Devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. The Locking Devices line represents a broad selection of plugs and connectors, locking receptacles, flanged inlets and outlets, California-style devices, midget locking devices, power interrupting devices, and non-NEMA devices. Leviton combines the best materials available with superior production standards to produce a broad selection of Locking Devices of unmatched flexibility and dependability.

## Features and Benefits

- Uncompromising industrial-grade quality for superior performance and long service life
- All industrial locking devices feature heavy-duty, impact-resistant construction
- Plugs and connectors accept wide range of conductors
- Terminals clearly identified on all devices to speed and simplify wiring
- Backed by a Limited 10-Year Warranty



## Locking Devices for the Entire Spectrum of Industrial Applications

### Locking Plugs and Connectors



Heavy-duty construction for top performance in the environmental extremes of grueling industrial settings.

Cat. No. 4720-C  
and 4579-C

### V-0-MAX™ Locking Flush Receptacles



Engineered for maximum performance with a UL 94 V-0 Flammability Rating.

Cat. No. 2610

### Flanged Inlets and Outlets



Built to endure hard use with rugged nylon flanges that assure a smooth, flush fit and outstanding resistance to cracking and breaking.

Cat. No. 2336

### Non-NEMA Locking Devices



Provided in selected 20A and 30A versions and a very broad range of 50A devices.

Cat. No. 7411-C

### Wetguard™



Specifically developed for wet or damp locations. EPTR thermoplastic rubber body and rugged design resists water, acids, alkalis, grease, oils and solvents.

Cat. No. 24W47

### Midget Locking Devices



ML1, ML2 and ML3 Locking devices covering the entire spectrum of industrial applications where restrained space considerations are a factor.

Cat. No. ML1-C

### Weather Resistant Boots



Feature triple seal action to protect locking plugs and connectors from the harmful effects of dirt and moisture in harsh operations.

Cat. No. 6034