

Product data sheet


Characteristics

NSYTBS241912H

ABS box IP66 IK07 RAL7035 Int.H225W175D120
Ext.H241W194D127 Opaque cover H40

Product availability : Stock - Normally stocked in distribution facility

Price* : 26.09 USD

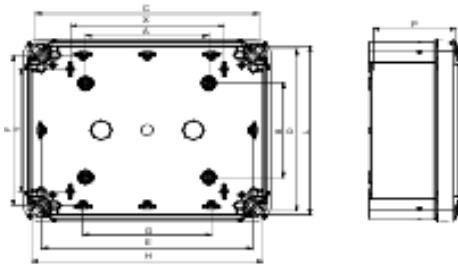

Main

Range	Thalassa
Product name	Thalassa TBS
Device application	Multi-purpose
Product or component type	Industrial box
Height	9.49 in (241 mm)
Width	7.64 in (194 mm)
Depth	5 in (127 mm)
Internal height	8.86 in (225 mm)
Internal width	6.89 in (175 mm)
Internal depth	4.72 in (120 mm)
Enclosure mounting	Wall mounted
Device composition	1 x body 1 x cover 4 x cover screw
Body type	One piece moulded
Type of front cover	High plain cover
Cover fixing	Plastic screws
Lock type	Outside sealed area: flat screwdriver captive screw
Removable parts	Cover, by captive screws

Complementary

Material	ABS
Colour	Grey (RAL 7035)
Standards	IEC 62208
Product certifications	TÜV SEMKO DEMKO

IP degree of protection	IP66conforming to NEMA 4.4X
IK degree of protection	IK07conforming to IEC 62262
Fire resistance	1202 °F (650 °C) conforming to IEC 60695-2-11
Ambient air temperature for storage	5...104 °F (-15...40 °C)
Ambient air temperature for operation	-13...140 °F (-25...60 °C)

Ordering and shipping details

Category	80033 - ENCLOSURE SYSTEMS POLYESTER
Discount Schedule	ES1
GTIN	00785901711155
Nbr. of units in pkg.	1
Package weight(Lbs)	1.72
Returnability	N
Country of origin	HU

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 0940 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product end of life instructions	Need no specific recycling operations

Contractual warranty

Warranty period	18 months
-----------------	-----------