



## Main

Range of product	Harmony XVC4
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	1 illuminated unit
Sound signalling	Without
Mounting diameter	1.57 in (40 mm)
Component name	XVC
Device short name	XVC
Light source	Red LED steady
Supply circuit type	AC/DC

## Complementary

Material	Polycarbonate (illuminated unit) ABS (acrylonitrile butadiene-styrene) (base unit) PBT + ABS (UL94HB) (top cover) SGP (chromium-plated) (support tube)
Mounting location	On support tube, 17 mm
Product mounting	On support tube, 17 mm
[Us] rated supply voltage	24 V
[Us] rated supply voltage	24 V
Cable cross section	0 in <sup>2</sup> (0.33 mm <sup>2</sup> )
AWG gauge	AWG 22
Cable length	23.62 in (600 mm)
Marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	25 mA
Flashing frequency	1 Hz
Product weight	1.1 lb(US) (0.5 kg)
Height	15.89 in (403.5 mm)

## Environment

standards	EN/IEC 61000-6-2 EN/IEC 61000-6-3
product certifications	UL
protective treatment	TC
ambient air temperature for storage	-31...158 °F (-35...70 °C)
ambient air temperature for operation	14...122 °F (-10...50 °C)
electrical shock protection class	Class I conforming to EN/IEC 61140
overvoltage category	Class I EN/IEC 61140
IP degree of protection	IP23 in vertical surface installation conforming to EN/IEC 60529 IP54 in flat surface installation conforming to EN/IEC 60529

## Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 0808 - Schneider Electric declaration of conformity	Compliant - since 0808 - Schneider Electric declaration of conformity
Reference contains SVHC above the threshold - go to CaP for more details	Reference contains SVHC above the threshold
Available	Available

Need no specific recycling operations	Need no specific recycling operations
---------------------------------------	---------------------------------------


## Contractual warranty

Warranty period	18 months
-----------------	-----------

## Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

### Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

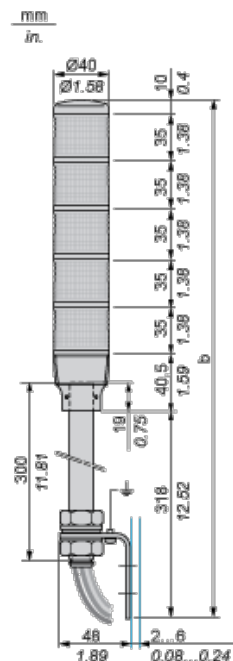

No. of illuminated units	b Without buzzer (mm)	b Without buzzer (in.)
1 stage	403.50	15.89
2 stages	438.50	17.26
3 stages	473.50	18.64
4 stages	508.50	20.02
5 stages	543.50	21.40

## Pre-assembled and Pre-wired Tower Light

### Support Tube Mounting

