


ZB4BZ1055

1-N/O AND 1-N/C CONTACT, WITH SPRING CLAMP AND

Product availability : Stock - Normally stocked in distribution facility

Price* : 42.00 USD

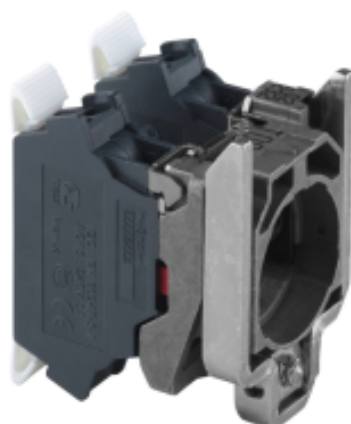

Main

Range of product	Harmony XB4
Product or component type	Complete body/contact assembly
Device short name	ZB4
Fixing collar material	Zamak
Sale per indivisible quantity	1
Contacts type and composition	1 NO + 2 NC
Contacts operation	Slow-break
Contact block type	Single
Device composition	Fixing collar Contact block

Complementary

CAD overall width	1.18 in (30 mm)
Product weight	0.14 lb(US) (0.064 kg)
Mechanical durability	10000000 cycles
Contacts material	Silver alloy (Ag/Ni)
[Ie] rated operational current	10 A, Q600 10 A, A600
Electrical durability	10000000 cycles, 10 A

Environment

Protective treatment	TH
Ambient air temperature for storage	-40...158 °F (-40...70 °C)
Ambient air temperature for operation	-40...158 °F (-40...70 °C)
IP degree of protection	IP20 conforming to IEC 60529

Ordering and shipping details

Category	22469 - PUSHBUTTON,22MM ACCESSORIES-NEW
Discount Schedule	CS2
GTIN	00785901570301
Nbr. of units in pkg.	1
Package weight(Lbs)	0.13
Returnability	N
Country of origin	FR

Contractual warranty

Warranty period	18 months
-----------------	-----------