


ERICO SYSTEM 3000 Interceptor – INTMKIVSS



- Dynamic response to the approach of a lightning downleader
- Designed for lower height installations
- Non-radioactive technology
- No external power required

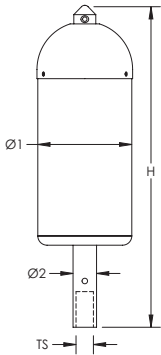

Part Number	INTMKIVSS
Installation Height (H)	65' Max
Diameter 1 (Ø1)	4"
Diameter 2 (Ø2)	1.03"
Height (H)	13.701"
Thread Size (TS)	1/2 BSPP
Unit Weight	4.535 lb
Certifications	UL
Standard Packaging Quantity	1 pc
UPC	78285658175
EAN-13	8711893041767

UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

WARNING

Pentair products shall be installed and used only as indicated in Pentair's product instruction sheets and training materials. Instruction sheets are available at erico.pentair.com and from your Pentair customer service representative. Improper installation, misuse, misapplication or other failure to completely follow Pentair's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2017 Pentair All rights reserved

Pentair, CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH and LENTON are owned by Pentair or its global affiliates.

All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.