


Crimp Bonding Plate – LPA533



- Compression type fingers crimp over cable for direct contact

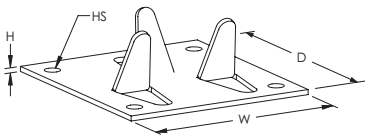

Part Number	LPA533
Conductor Size, UL	Class 1
Material	Aluminum
Contact Area	8 in ² Min
Depth [D]	3.49"
Height [H]	0.1"
Width [W]	2 1/2"
Hole Size [HS]	0.2"
Unit Weight	0.09 lb
Certifications	UL
Standard Packaging Quantity	1 pc
UPC	78285642460

Bonding plates are required to have a minimum of 3 in² [1,935 mm²] of contact area. When the structural steel is to be used as the primary down conductor for the lightning protection system 8 in² [5,161 mm²] of contact area is required.

UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2021 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.