


# Industrial Stack Bonding Lug – LPS451



- Cast lug for bonding conductors to structural features

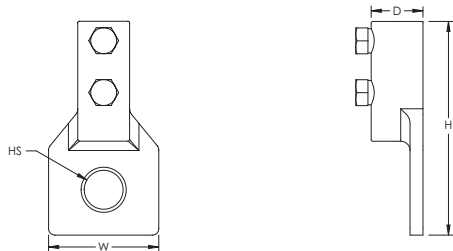

Part Number	LPS451
Conductor Size, UL	Class 1 - Class 2 [4/0 Max]
Material	Stainless Steel 316L (EN 1.4404)
Hole Size (HS)	3/4"
Contact Area	3 in <sup>2</sup> Min
Depth (D)	1 1/16"
Height (H)	4 1/8"
Width (W)	2 1/8"
Unit Weight	0.62 lb
Certifications	UL
Standard Packaging Quantity	1 pc
UPC	78285643517

Where applicable, lead covering thickness is a minimum of 1/16" (1.59 mm) and is not included in the stated dimensions.

UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

## WARNING

Pentair products shall be installed and used only as indicated in Pentair's product instruction sheets and training materials. Instruction sheets are available at [erico.pentair.com](http://erico.pentair.com) and from your Pentair customer service representative. Improper installation, misuse, misapplication or other failure to completely follow Pentair's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2017 Pentair. All rights reserved.

Pentair, CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH and LENTON are owned by Pentair or its global affiliates.

All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.