




GE
Lighting

31590 - F14W/T5/830/ECO

GE Ecolux® Starcoat® T5

- Passes TCLP, which can lower disposal costs.

a product of
ecomagination

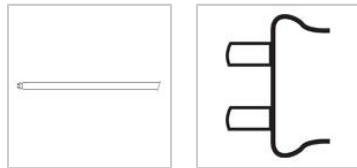

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning


- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Lamp Mortality

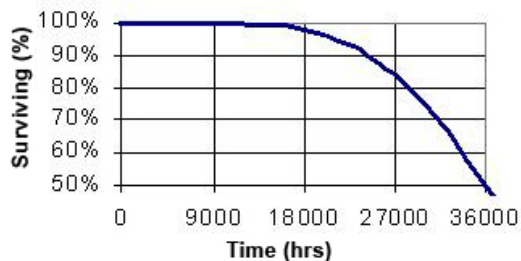

Graphs_Lumen Maintenance

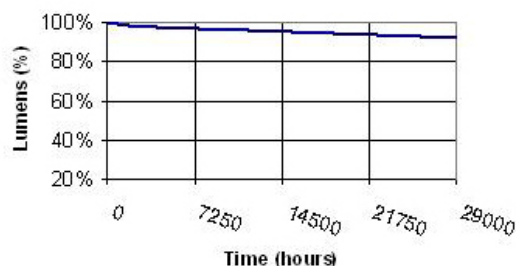

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight Linear
Bulb	T5
Base	Miniature Bi-Pin (G5)
Rated Life	30000.0 hrs
Rated Life (rapid start) @ Time	30000.0 @ 3.0/36000.0 @ 12.0 h
Bulb Material	Soda lime
Starting Temperature (MIN)	-20.0 °C
LEED-EB MR Credit	67 picograms Hg per mean lumen hour
Additional Info	TCLP compliant
Primary Application	Full Wattage

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1350.0
Mean Lumens	1240.0
Nominal Initial Lumens per Watt	96
Color Temperature	3000.0 K
Color Rendering Index (CRI)	85.0
S/P Ratio (Scotopic/Photopic Ratio)	1.3

ELECTRICAL CHARACTERISTICS

Wattage	14.0
Voltage	82.0
Open Circuit Voltage (rapid start) Min @ Temperature	230 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL)	21.6000 in(548.6 mm)
Nominal Length	21.600 in(548.6 mm)
Bulb Diameter (DIA) (MAX)	0.670 in(17.0 mm)
Bulb Diameter (DIA)	0.625 in(15.9 mm)
Max Base Face to Base Face (A)	21.610 in(548.9 mm)
Face to End of Opposing Pin (B) (MIN)	21.790 in(553.5 mm)
Face to End of Opposing Pin (B) (MAX)	21.890 in(556.0 mm)

PRODUCT INFORMATION

Product Code	31590
Description	F14W/T5/830/ECO
Standard Package	Case
Standard Package GTIN	10043168315903
Standard Package Quantity	40
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	40
UPC	043168315906

Graphs_Spectral Power Distribution

